


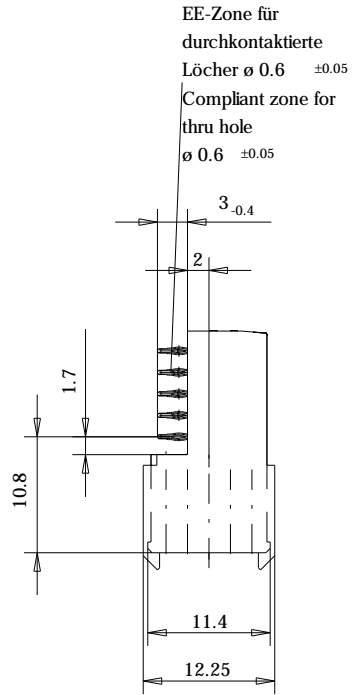


Bestückungsplan - contact layout

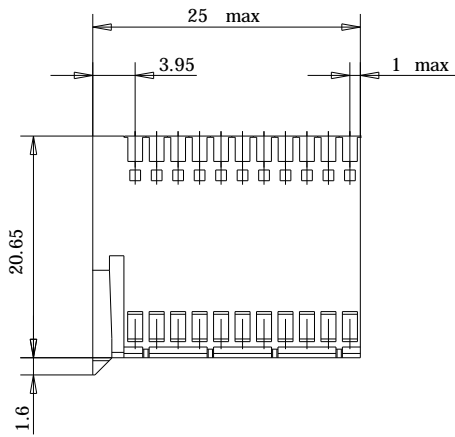


■ = bestückt - assemble

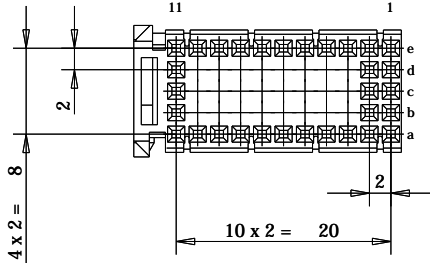

EE-Zone für durchkontaktierte Löcher  $\varnothing 0.6 \pm 0.05$   
Compliant zone for thru hole  $\varnothing 0.6 \pm 0.05$

Lochbild für Leiterplatte (Bestückungsseite)

Board hole pattern (Component mounting side)

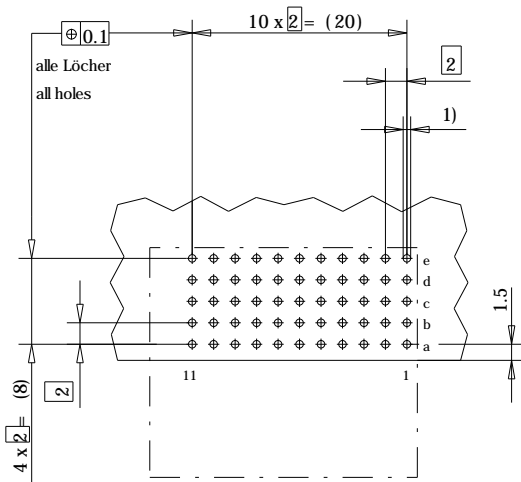

- 1)  $\varnothing 0.6 \pm 0.05$  Durchmesser des metallisierten Loches  
 $\varnothing 0.6 \pm 0.05$  Diameter of finished plated-through hole
- $\varnothing 0.7 \pm 0.02$  Bohrungsdurchmesser des Loches  
 $\varnothing 0.7 \pm 0.02$  Diameter of drilled hole

Schichtaufbau im metallisierten Loch  
siehe Zeichnung 114406



Metal plating of plated-through hole  
see drawing 114406

Fehlende Masse und Angaben nach IEC 61076-4-101

Bedruckung siehe Zeichnung 401194

Missing information and dimensions per IEC 61076-4-101

Marking see drawing 401194

Information: ohne Fixierstift without locating pegs	Tolerances  All Dimensions in mm	Scale 2:1	Angaben zu entsprechender Klient-Nr. siehe Fertigungsunterlagen For further information about I.D. number see manufacturing document.
		Designation <b>ERmet Federleiste C</b> <b>ERmet Female Type C</b>	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.  www.ERNI.com	<b>044145</b>	
		I	
d	03.07.2003	ERM	
Index	Date	V:00030236.SZA	

Consider protection memo from DIN 34