



0980




0980-0-15-20-75-14-11-0
Double action, *.055 Combined Stroke
Mount between parallel circuit boards

0925




0925-0-15-20-73-14-26-0
Standard Stroke
Surface Mount

0930




0930-0-15-20-75-14-11-0
Standard Stroke
Solder Mount in .018 min. mounting hole

0932




0932-0-15-20-77-14-11-0
Long Stroke
Solder Mount in .027 min. mounting hole

0934




0934-0-15-20-74-14-26-0
Standard Stroke
Surface Mount

0923




0923-0-15-20-78-14-11-0
Short Stroke
Surface Mount

0927




0927-0-15-20-75-14-11-0
Standard Stroke
Surface Mount

0928




0928-0-15-20-77-14-11-0
Long Stroke
Surface Mount

0929




0929-0-15-20-75-14-11-0
Standard Stroke
Solder Mount in .027 min. mounting Hole

0936



0936-0-15-20-75-14-11-0
Standard Stroke
Surface Mount

0908-X

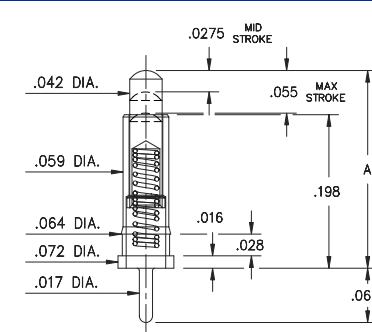

0908-X-15-20-75-14-11-0
Standard Stroke
Solder mount in .018 min. mounting hole

Basic Part Number	Length A
0908-0	.255
0908-1	.275
0908-2	.295
0908-3	.315
0908-4	.335
0908-5	.350
0908-6	.370
0908-7	.390
0908-8	.410
0908-9	.430

SPECIFICATIONS

SLEEVE & PLUNGER MATERIAL: Copper Alloy
SPRING MATERIAL: Beryllium Copper
CURRENT RATING: 2A continuous, 3A peak
CONTACT RESISTANCE: 20mΩ max.
DURABILITY: 1,000,000 cycles min.
DIMENSION IN INCHES
TOLERANCES ON: LENGTHS: ±.005
 DIAMETERS: ±.002
 ANGLES: ± 2°

ORDER CODE: XXXX - X - 15 - 20 - 7X - 14 - XX - 0

BASIC PART # →
SLEEVE & PLUNGER FINISH: 20 20μ" GOLD OVER NICKEL
SPRING →
 71 Standard Stroke (.055): xx grams@min stroke
 75 Standard Stroke (.055): 25 grams@min stroke
 73/74 Standard Stroke (.055): 60 grams@min stroke
 77 Long Stroke (.090): 95 grams@min stroke
 78 Short Stroke (.039): xx grams@min stroke
SPRING FINISH: 14 10μ" GOLD OVER NICKEL

