

INTERCONNECTS

SERIES 800, 801, 802, 803 • .100" GRID SOLDER CUP HEADERS AND SOCKETS • SINGLE AND DOUBLE ROW STRIPS

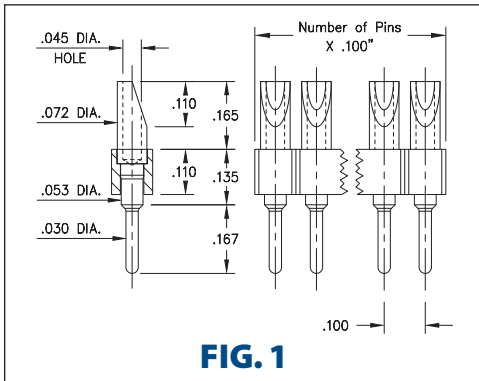


FIG. 1

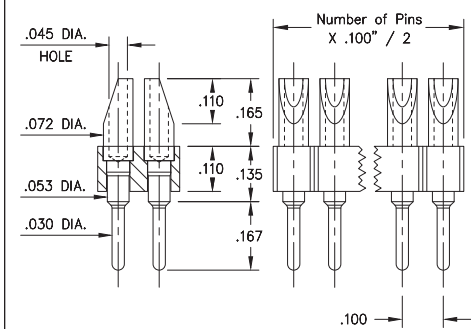


FIG. 2

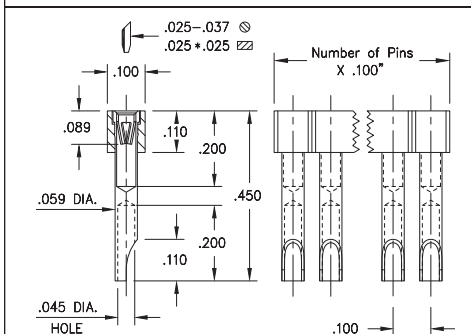


FIG. 3


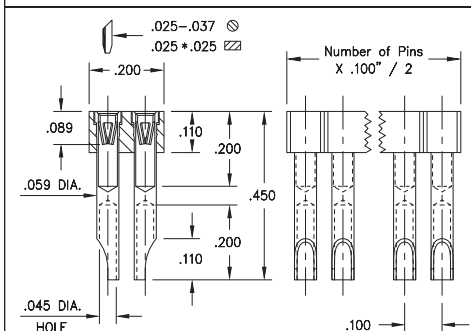


FIG. 4

- Series 800 and 802 use MM #1107 pins. See page 218 for details
- Series 801 and 803 use MM #1134 pin receptacles and accept pin diameters from .025"-.037" and .025" square pins. See page 177 for details
- Series 801 and 803 receptacles use Hi-Rel, 4-finger BeCu #47 contact rated at 4.5 amps. See page 256 for details
- Solder cups are pre-aligned and accept up to 20 AWG wire
- Insulators are high temperature thermoplastic, suitable for all soldering operations

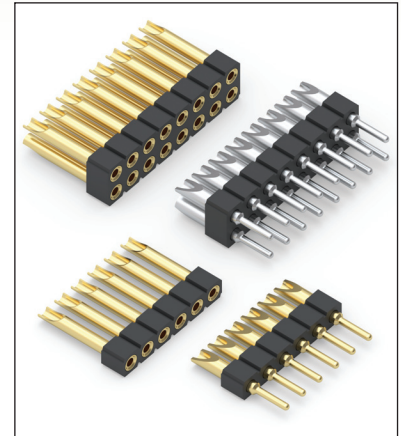

ORDERING INFORMATION













FIG. 1	Series 800...007	Single Row Solder Cup / Solder Tail	
	800-XX-0	-10-007000	02-64
Specify number of pins			
FIG. 2	Series 802...007	Double Row Solder Cup / Solder Tail	
	802-XX-0	-10-007000	02-64
Specify number of pins			
  			
SPECIFY PLATING CODE XX=		10 	40 
Pin Plating 		10 μ" Au	200 μ" Sn

FIG. 3	Series 801...007	Single Row Solder Cup Sockets	
	801-13-0	-10-007000	02-64
Specify number of pins			
FIG. 4	Series 803...007	Double Row Solder Cup Sockets	
	803-13-0	-10-007000	02-64
Specify number of pins			
  			
SPECIFY PLATING CODE XX=		13 	
Sleeve (Pin) 		10 μ" Au	
Contact (Clip) 		30 μ" Au	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[802-10-022-10-007000](#) [802-10-026-10-007000](#) [802-10-028-10-007000](#) [802-10-040-10-007000](#) [802-10-054-10-007000](#) [802-10-060-10-007000](#) [801-13-009-10-007000](#) [801-13-004-10-007000](#) [801-13-008-10-007000](#) [802-10-008-10-007000](#) [801-13-007-10-007000](#) [803-13-004-10-007000](#) [803-13-008-10-007000](#) [803-13-006-10-007000](#) [802-10-004-10-007000](#) [800-10-002-10-007000](#) [800-10-008-10-007000](#) [800-10-004-10-007000](#) [801-13-003-10-007000](#) [801-13-006-10-007000](#) [800-10-003-10-007000](#) [800-10-007-10-007000](#) [800-10-005-10-007000](#) [802-10-006-10-007000](#) [801-13-005-10-007000](#) [800-10-006-10-007000](#) [800-10-009-10-007000](#) [801-41-001-10-002000](#) [801-41-001-10-013000](#) [801-41-001-20-001000](#) [801-41-005-10-013000](#) [801-41-006-40-002000](#) [801-41-001-62-001000](#) [801-41-003-10-003000](#) [801-41-006-10-004000](#) [801-41-001-10-004000](#) [801-41-002-10-001000](#) [801-41-002-20-001000](#) [801-41-003-20-001000](#) [801-41-006-10-012000](#) [801-41-010-10-013000](#) [801-41-001-10-001000](#) [801-41-001-10-012000](#) [801-41-002-10-002000](#) [801-41-002-40-002000](#) [801-41-003-40-002000](#) [801-41-007-10-004000](#) [801-41-012-10-002000](#) [801-41-003-10-001000](#) [801-41-004-10-012000](#) [801-41-005-10-003000](#) [801-41-005-40-002000](#) [801-41-007-10-001000](#) [801-41-008-10-001000](#) [801-41-009-10-001000](#) [801-41-011-10-001000](#) [801-41-013-10-004000](#) [801-41-008-10-004000](#) [801-41-010-10-001000](#) [801-41-010-10-004000](#) [801-41-015-10-001000](#) [801-41-014-10-001000](#) [801-41-025-10-002000](#) [801-41-037-10-002000](#) [801-43-001-10-013000](#) [801-43-007-30-001000](#) [801-43-005-10-013000](#) [801-43-008-30-001000](#) [801-43-004-10-004000](#) [801-43-012-10-004000](#) [801-43-025-10-004000](#) [801-43-035-30-001000](#) [801-44-002-40-002000](#) [801-91-001-10-012000](#) [801-91-004-20-001000](#) [801-91-012-10-004000](#) [801-91-010-10-004000](#) [801-91-015-62-001000](#) [801-91-020-10-001000](#) [801-91-023-20-001000](#) [801-91-038-10-004000](#) [801-93-008-40-002000](#) [801-93-006-10-004000](#) [801-93-012-10-004000](#) [801-99-008-10-002000](#) [801-99-004-10-002000](#) [801-99-012-10-012000](#) [801-99-020-20-001000](#) [801-99-040-10-002000](#) [801-99-033-10-001000](#) [801-99-063-10-002000](#) [803-41-008-10-001000](#) [803-41-014-10-003000](#) [803-41-002-10-002000](#) [803-41-026-10-001000](#) [803-41-018-10-001000](#) [803-41-026-10-002000](#) [803-41-050-10-004000](#) [803-43-010-10-003000](#) [803-43-012-10-001000](#)