

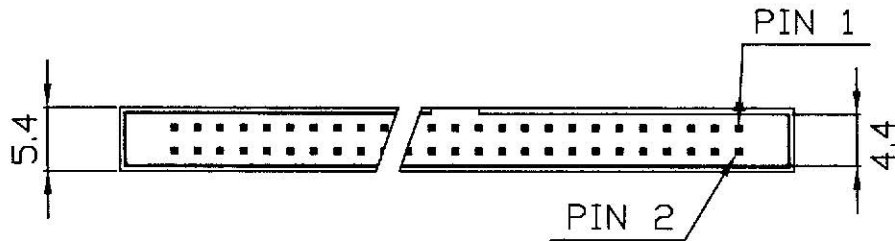



**Materials:**

- Insulator: Polyester, UL 94V-0; Standard PA6T
- Contact Material: Copper Alloy
- Finish: Gold plated
- Standard: Gold Flash all over

**Electrical:**

- Current Rating: 1 Amp
- Insulation Resistance: 5,000MΩ Min.
- Dielectric Withstanding, 500V AC
- Operating Temperature: -40°C ~ +105°C

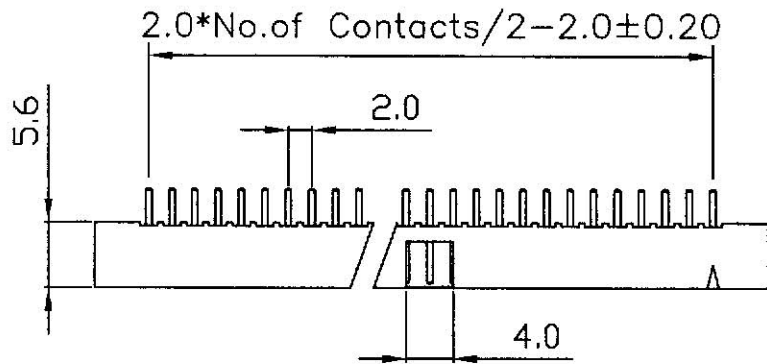

Recommended P.C. Board  
Tolerances: ±0.05mm  
Hole Layout

'XX' = No. of Contacts: 10, 14, 16, 20, 24, 26, 30  
34, 40, 50, 60, 64

⊕ = Assmann Logo



ITEM NO

**AWHW2-xxG-0202-T-R**

TITLE

IDC Box Header, Straight 2.0MM, No Latches

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved