

Note: This datasheet may be out of date. Please download the latest datasheet of LQH3NPN4R7NJ0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN4R7NJ0%23

"#" indicates a package specification code.

LQH3NPN4R7NJ0#


Size Code 3030 (1212) in mm (in inch), 1.2mm max. Thickness



< List of part numbers with package codes > LQH3NPN4R7NJ0K LQH3NPN4R7NJ0L

Appearance & Shape







References

Packaging	Specifications	Standard
		Packing
		Quantity
К	330Embossed Tape	5000
L	180Embossed Tape	1000

Mass (typ.)			
1 piece	0.045g		



Notices

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by selfgenerated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus selfgeneration of heat) under 125°C.

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQH3NPN4R7NJ0#

Note: This datasheet may be out of date. Please download the latest datasheet of LQH3NPN4R7NJ0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN4R7NJ0%23

"#" indicates a package specification code.



Specifications

L size	3.0±0.2mm
W size	3.0±0.2mm
T size	1.1±0.1mm
Size code inch (mm)	1212 (3030)
Inductance	4.7µH±30%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	780mA
Rated current (Itemp) (Based on Temperature rise)	1120mA
Max. of DC resistance	0.156Ω
Operating Temperature Range (Self-temperature rise is included)	-40℃ to 125℃
Class of magnetic shield	Magnetic Resin
Self resonance frequency (min.)	65MHz
Operating Temperature Range(Self-temperature rise is not included)	-40℃ to 85℃
DC Resistance Intermediate Values	0.130Ω±20%
Series	LQH3NPN_J0

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.






LQH3NPN4R7NJ0#

Characteristic Data


Note: This datasheet may be out of date. Please download the latest datasheet of LQH3NPN4R7NJ0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN4R7NJ0%23


"#" indicates a package specification code.

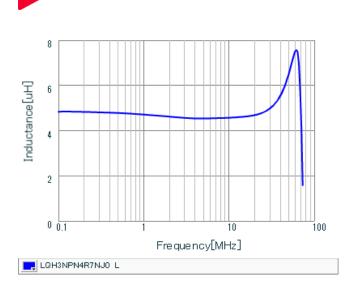

Inductance - Frequency Characteristics

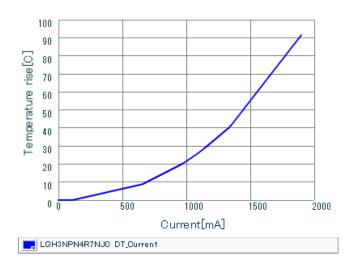

Temperature Increase Characteristic

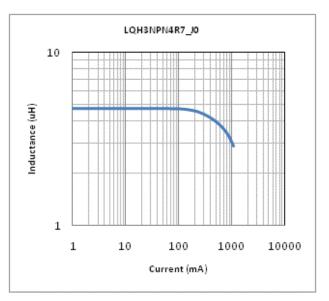

Impedance - Current Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata: LQH3NPN4R7NJ0L