


Specifications:

Current Rating: 1.5A AC/DC (B)
 Voltage Rating: 30V AC/DC
 Contact Resistance: 30m ohm. Max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 500V AC For One Minute
 Operating Temperature Range: -50°C ~ +85°C (B)




Material and Finish

Insulator: PBT or Nylon 9T or LCP (UL94V-0) (F) (G)
 Contact: Phosphor Bronze
 Plating: Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell: Brass, Nickel Plated
 Back Cover: SPCC, Matte Nickel Plated

How To Order

USB-B1HSXX-X

- Blank PBT
- H: LCP (G)
- 6: Standard Selective Plated
- 7: Selective Gold Plated 15u"
- 8: Selective Gold Plated 30u"
- BK: Black
- WH: White

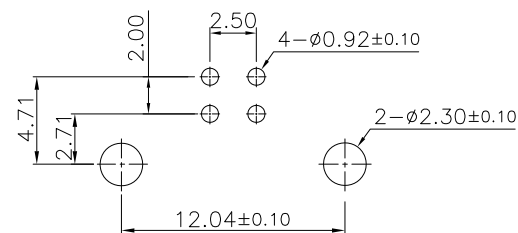

P.C.B Layout

RoHS Compliant

K			
J			
I			
H			
G	30-Dec-2020	Add LCP	Jamie Wang
A	13-Jul-2011		Zhou
REV	DATE	FILE	BY

DRAWN:	Zhou
CHECKED:	Jeremy Liu
APPROVAL:	Mike Wu
GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1/1
PROJECTION:	

ON-SHORE TECHNOLOGY, INC.

DESCRIPTION:	USB B Type PCB Socket Right Angle Type	SIZE
PART NO:	USB-B1HSXX (F)	