KBM01-230200180 P2. TAI-TECH

Ferrite Chip Bead(Lead Free)

FCM-SERIES


Certificate

Green Partner

1.Features

- 1. Monolithic inorganic material construction.
- 2. Closed magnetic circuit avoids crosstalk.
- 3. S.M.T. type.
- 4. Suitable for reflow soldering.
- 5. Shapes and dimensions follow E.I.A. spec.
- 6. Available in various sizes.
- 7. Excellent solder ability and heat resistance.
- 8. High reliability.
- 9. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 10. Operating Temperature: -55~+125°C (Including self-temperature rise)

2. Dimensions



	Chip size							
Size	A(mm)	C(mm)	D(mm)					
1005	1.0±0.10	0.50±0.10	0.50±0.10	0.25±0.10				
1608	1.6±0.15	0.80±0.15	0.80±0.15	0.30±0.20				
2012	2.0±0.20	1.25±0.20	0.85±0.20	0.50±0.30				
3216	3.2±0.20	1.60±0.20	1.10±0.20	0.50±0.30				

3.Part Numbering




B: Dimension

Lead Free Material C: Material **121=120**Ω

D: Impedance

E: Packaging T=Taping and Reel, B=Bulk(Bags)

F: Rated Current

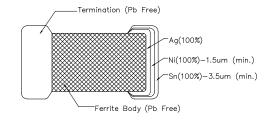

4. Specification

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.	
FCM1005KF-300T03	30±25%	100	0.20	300	
FCM1005KF-600T03	60±25%	100	0.25	300	
FCM1005KF-121T01	120±25%	100	0.30	100	
FCM1005KF-151T01	150±25%	100	0.30	100	
FCM1005KF-221T01	220±25%	100	0.40	100	
FCM1005KF-301T01	300±25%	100	0.50	100	
FCM1005KF-471T01	470±25%	100	0.65	100	
FCM1005KF-601T00	600±25%	100	0.80	80	
FCM1005KF-102T00	1000±25%	100	1.20	50	
FCM1005MF-600T01	60±25%	100	0.30	100	
FCM1005MF-121T00	120±25%	100	0.45	80	
FCM1005MF-221T00	220±25%	100	0.60	50	
FCM1005MF-301T00	300±25%	100	0.75	50	

TAI-TECH KBM01-230200180 P3.

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.
FCM1608KF-300T07	30±25%	100	0.20	700
FCM1608KF-600T07	60±25%	100	0.20	700
FCM1608KF-121T06	120±25%	100	0.25	600
FCM1608KF-151T06	150±25%	100	0.25	600
FCM1608KF-221T05	220±25%	100	0.30	550
FCM1608KF-301T05	300±25%	100	0.35	500
FCM1608KF-471T03	470±25%	100	0.45	350
FCM1608KF-601T03	600±25%	100	0.50	350
FCM1608KF-102T02	1000±25%	100	0.70	200
FCM1608HF-152T02	1500±25%	100	1.00	200
FCM1608HF-202T01	2000±25%	100	1.20	150
FCM1608CF-100T07	10±25%	100	0.20	700
FCM1608CF-300T06	30±25%	100	0.25	600
FCM1608CF-600T06	60±25%	100	0.30	600
FCM1608CF-121T03	120±25%	100	0.40	300
FCM1608CF-151T03	150±25%	100	0.40	300
FCM1608CF-221T02	220±25%	100	0.60	250
FCM1608CF-301T02	300±25%	100	0.80	200
FCM1608CF-471T02	470±25%	100	0.85	200
FCM1608CF-601T01	600±25%	100	1.20	150
FCM2012KF-110T09	11±25%	100	0.10	900
FCM2012KF-170T06	17±25%	100	0.10	600
FCM2012KF-260T06	26±25%	100	0.10	600
FCM2012KF-300T06	30±25%	100	0.10	600
FCM2012KF-400T06	40±25%	100	0.10	600
FCM2012KF-600T09	60±25%	100	0.10	900

TAI-TECH KBM01-230200180 P4.

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.
FCM2012KF-121T08	120±25%	100	0.20	800
FCM2012KF-151T08	150±25%	100	0.20	800
FCM2012KF-221T07	220±25%	100	0.30	750
FCM2012KF-301T07	300±25%	100	0.30	700
FCM2012KF-471T07	470±25%	100	0.35	700
FCM2012KF-601T05	600±25%	100	0.40	500
FCM2012KF-102T04	1000±25%	100	0.45	400
FCM2012HF-102T04	1000±25%	100	0.45	400
FCM2012HF-152T03	1500±25%	100	0.50	350
FCM2012HF-202T02	2000±25%	100	0.60	250
FCM2012NF-070T06	7±25%	100	0.10	600
FCM2012CF-121T06	120±25%	100	0.25	600
FCM2012CF-221T04	220±25%	100	0.30	400
FCM2012CF-301T04	300±25%	100	0.35	400
FCM3216KF-260T05	26±25%	100	0.20	500
FCM3216KF-310T05	31±25%	100	0.20	500
FCM3216KF-420T05	42±25%	100	0.20	500
FCM3216KF-500T05	50±25%	100	0.20	500
FCM3216KF-700T05	70±25%	100	0.20	500
FCM3216KF-900T05	90±25%	100	0.20	500
FCM3216KF-121T09	120±25%	100	0.15	900
FCM3216KF-151T09	150±25%	100	0.15	900
FCM3216KF-201T06	200±25%	100	0.35	600
FCM3216KF-221T07	220±25%	100	0.35	700
FCM3216KF-301T07	300±25%	100	0.35	700
FCM3216KF-471T04	470±25%	100	0.35	400
FCM3216KF-601T04	600±25%	100	0.40	400

FCM3216KF-601T04 600±25%

● Rated current: based on temperature rise test

[•] In compliance with EIA 595

TAI-TECH KBM01-230200180 P5.


5. Reliability and Test Condition

Item	Performance	Test Condition			
Series No.	FCB FCM HCB GHB FCA				
Operating Temperature	-55∼+125°C (Including self-temperature rise)				
Transportation Storage Temperature	-55~+125˚ℂ (on board)	For long storage conditions, please see the Application Notice			
Impedance (Z)	Refer to standard electrical characteristics list	Agilent4291 Agilent E4991 Agilent4287 Agilent16192			
DC Resistance	Refer to standard electrical characteristics list	Agilent 4338			
Rated Current		DC Power Supply Over Rated Current requirements, there will be some risk			
Temperature Rise Test	Rated Current < 1A ∆T 20℃Max Rated Current ≧ 1A ∆T 40℃Max	Applied the allowed DC current. Temperature measured by digital surface thermometer.			
Life test	Appearance: no damage.	Preconditioning: Run through reflow for 3 times.(IPC/JEDEC J-STD-020E Classification Reflow Profiles) Temperature: 125±2°C Applied current: rated current. Duration: 1000±12hrs. Measured at room temperature after placing for 24±2 hrs.			
Load Humidity	Impedance: within±15% of initial value. RDC: within ±15% of initial value and shall not exceed the specification value	Preconditioning: Run through reflow for 3 times. (IPC/JEDEC J-STD-020E Classification Reflow Profiles) Humidity: 85±2%R.H. Temperature: 85±2°C. Duration:1000hrsMin.Bead:with100%ratedcurrent • Inductance: with 10% rated current Measured at room temperature after placing for 24±2 hrs			
Thermal shock	Appearance: no damage. Impedance: within±15%of initial value. RDC: within ±15% of initial value and shall not exceed the specification value	Freconditioning: Run through reflow for times.(PC/JEDEC J-STD-020E Classification Reflow Profiles) Condition for 1 cycle Step1: -55±2°C 30±5 min. Step2: 125±2°C 30±5min. Step3: 125±2°C 30±5min. Number of cycles: 500 Measured at room temperature after placing for 24±2 hrs.			
Vibration	Appearance : No damage. Impedance : within±15% of initial value RDC : within ±15% of initial value and shall not exceed the specification value	Preconditioning: Run through reflow for times.(IPC/JEDEC J-STD-020E Classification Reflow Profiles) Oscillation Frequency: 10Hz ~ 2KHz ~ 10Hofor 20 minutes Equipment: Vibration checker Total Amplitude:10g Testing Time: 12 hours(20 minutes, 12 cycle each of 3 orientations)			
Bending	Appearance: No damage. Impedance: within±10% of initial value RDC: within±15% of initial value and shall not exceed the specification value	Shall be mounted on a FR4 substrate of the following dimensions: >=0805inch(2012mm):40x100x1.2mm <0805inch(2012mm):40x100x0.8mm Bending depth: >=0805inch(2012mm):1.2mm <0805inch(2012mm):0.8mm Duration of 10 sec for a min.			
		Test condition:			
Shock	Appearance : No damage. Impedance : within±10% of initial value	Type Value duration (g's) (D) (ms) Wave form change (Vi)ft/sec			
	RDC: within ±15% of initial value and shall not exceed the specification value	SMD 50 11 Half-sine 11.3			
		Lead 50 11 Half-sine 11.3			
Solderability	More than 95% of the terminal electrode should be covered with solder.	a.Method B, 4 hrs @155°C dry heat @235°C±5°C Test time:5 +0/-0.5 seconds. b. Method D category 3. (steam aging 8hours ± 15 min)@ 260°C±5°C Test time: 30 +0/-0.5 seconds			

Item	Performance		Те	st Con	dition
		Number of heat	cycles: 1		
Resistance to Soldering	Appearance : No damage.	Temperature (°C)	Time (s)	Temperature ramp/immersion and emersion rate	
Heat	·	npedance: within±15% of initial value IDC: within ±15% of initial value and shall not exceed the specification value			25mm/s ±6 mm/s
		Depth: completely cover the termination			
Terminal strength	Appearance: No damage. Impedance: within±15% of initial value RDC: within±15% of initial value and shall not exceed the specification value		Reflow Profiles) Component moi >0805inch(2012 <=0805inch(201 to the side of a shall be applied	unted on a mm):1kg 2mm):0.5 device bei I for 60 + oplied grad	2-020E Classification a PCB apply a force kg ng tested. This force 1 seconds. Also the lually as not to shock

**Derating Curve


For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over $85^{\circ}\mathrm{C}$, the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.




6. Soldering and Mounting

6-1. Recommended PC Board Pattern

	Chip Size						Pattern ow Sold	• • • •
Series	Type	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	E(mm) F(mm)	
FCB	<mark>1005</mark>	1.0±0.10	0.50±0.10	0.50±0.10	0.25±0.10	<mark>0.50</mark>	<mark>0.40</mark>	<mark>0.60</mark>
FCM	<mark>1608</mark>	<mark>1.6±0.15</mark>	0.80±0.15	0.80±0.15	0.30±0.20	<mark>0.80</mark>	<mark>0.85</mark>	<mark>0.95</mark>
нсв	2012	<mark>2.0±0.20</mark>	<mark>1.25±0.20</mark>	0.85±0.20	0.50±0.30	1.05	1.00	<mark>1.45</mark>
GHB	2012	2.0±0.20	1.25±0.20	1.25±0.20	0.50±0.30			
FCI	<mark>3216</mark>	<mark>3.2±0.20</mark>	<mark>1.60±0.20</mark>	1.10±0.20	0.50±0.30	<mark>1.05</mark>	<mark>2.20</mark>	<mark>1.80</mark>
FHI	3225	3.2±0.20	2.50±0.20	1.30±0.20	0.50±0.30	1.05	2.20	2.70
FCH	4516	4.5±0.20	1.60±0.20	1.60±0.20	0.50±0.30	1.05	3.30	1.80
HCI	4532	4.5±0.20	3.20±0.20	1.50±0.20	0.50±0.30	1.05	3.30	3.40



Land
Solder Resist



PC board should be designed so that products can prevent damage from mechanical stress when warping the board.

6-2. Soldering

Mildly activated rosin fluxes are preferred. TAI-TECH terminations are suitable for re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

TAI-TECH KBM01-230200180 P7.

6-2.1 Soldering Reflow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1. Table 1.1&1.2 (J-STD-020E)

6-2.2 Soldering Iron:

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended. (Figure 2.)

- Never contact the ceramic with the iron tip1.0mm tip diameter (max)
- · Use a 20 watt soldering iron with tip diameter of 1.0mm
- · Limit soldering time to 4~5sec.

Fig.1 Soldering Reflow

• 350°C tip temperature (max)


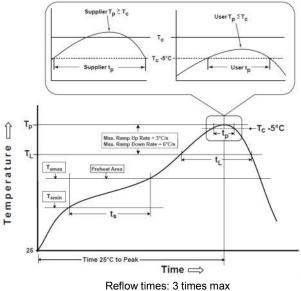


Fig. Fig.2 Iron soldering temperature profiles

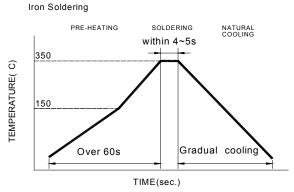

Iron Soldering times: 1 times max

Reliow times. 5 times ma

Table (1.1): Reflow Profiles

Profile Type:	Pb-Free Assembly
$\label{eq:continuous_series} \begin{split} & - \text{Temperature Min}(T_{\text{smin}}) \\ & - \text{Temperature Max}(T_{\text{smax}}) \\ & - \text{Time}(t_{\text{s}}) \text{from}(T_{\text{smin}} \text{ to } T_{\text{smax}}) \end{split}$	150℃ 200℃ 60-120seconds
Ramp-up rate(T₋to Tp)	3℃/second max.
Liquidus temperature(T_L) Time(t_L)maintained above T_L	217°C 60-150 seconds
Classification temperature(T _c)	See Table (1.2)
Time(t _p) at Tc- 5°C (Tp should be equal to or less than Tc.)	< 30 seconds
Ramp-down rate(Tp to TL)	6°C /second max.
Time 25℃ to peak temperature	8 minutes max.

Tp: maximum peak package body temperature, Tc: the classification temperature.

For user (customer) ${\bf Tp}$ should be equal to or less than ${\bf Tc.}$

Table (1.2) Package Thickness/Volume and Classification Temperature (Tc)


	Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6-2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

Reflow is referred to standard IPC/JEDEC J-STD-020E •

6-2.3 Solder Volume:


Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:

Minimum fillet height = soldering thickness + 25% product height



7.Packaging Information


7-1. Reel Dimension

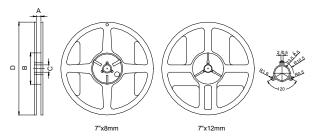


Туре	A(mm)	B(mm)	C(mm)	D(mm)
7"x8mm	9.0±0.5	<mark>60±2</mark>	13.5±0.5	178±2
7"x12mm	13.5±0.5	60±2	13.5±0.5	178±2

7-2.1 Tape Dimension / 8mm

■Material of taping is paper

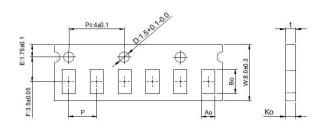


Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
<mark>100505</mark>	<mark>1.12±0.03</mark>	<mark>0.62±0.03</mark>	<mark>0.60±0.03</mark>	<mark>2.0±0.05</mark>	<mark>0.60±0.03</mark>

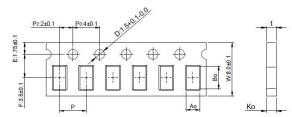


Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)
<mark>160808</mark>	1.80±0.05	0.96+0.05/-0.03	<mark>0.95±0.05</mark>	<mark>4.0±0.10</mark>	<mark>0.95±0.05</mark>
<mark>201209</mark>	2.10±0.05	<mark>1.30±0.05</mark>	<mark>0.95±0.05</mark>	<mark>4.0±0.10</mark>	<mark>0.95±0.05</mark>

■Material of taping is plastic

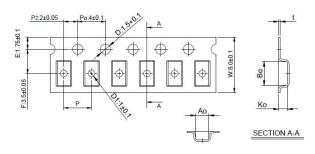

Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
201212	2.10±0.10	1.28±0.10	1.28±0.10	4.0±0.10	0.22±0.05	1.0±0.10
<mark>321611</mark>	3.35±0.10	1.75±0.10	<mark>1.25±0.10</mark>	4.0±0.10	0.23±0.05	1.0±0.10
322513	3.42±0.10	2.77±0.10	1.55±0.10	4.0±0.10	0.22±0.05	1.0±0.10
321609	3.40±0.10	1.77±0.10	1.04±0.10	4.0±0.10	0.22±0.05	1.0±0.10

7-2.2 Tape Dimension / 12mm

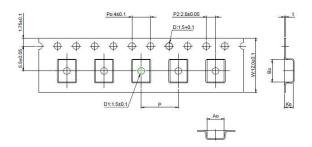


Size	Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	t(mm)	D1(mm)
451616	4.70±0.10	1.75±0.10	1.75±0.10	4.0±0.10	0.24±0.05	1.5±0.10
453215	4.70±0.10	3.45±0.10	1.60±0.10	8.0±0.10	0.24±0.05	1.5±0.10

TAI-TECH KBM01-230200180 Pg.

7-3. Packaging Quantity

Chip Size	453215	451616	322513	<mark>321611</mark>	321609	201212	<mark>201209</mark>	<mark>160808</mark>	<mark>100505</mark>
Chip / Reel	1000	2000	2500	<mark>3000</mark>	3000	2000	<mark>4000</mark>	<mark>4000</mark>	<mark>10000</mark>
Inner box	4000	8000	12500	<mark>15000</mark>	15000	10000	20000	<mark>20000</mark>	<mark>50000</mark>
Middle box	20000	40000	62500	<mark>75000</mark>	75000	50000	<mark>100000</mark>	<mark>100000</mark>	<mark>250000</mark>
Carton	40000	80000	125000	<mark>150000</mark>	150000	100000	200000	200000	500000

7-4. Tearing Off Force



The force for tearing off cover tape is 15 to 60 grams in the arrow direction under the following conditions.

Room Temp.	Room Humidity	Room atm	Tearing Speed
(℃)	(%)	(hPa)	mm/min
5~35	45~85	860~1060	300

Application Notice

Storage Conditions(component level)


To maintain the solder ability of terminal electrodes:

- 1. TAI-TECH products meet IPC/JEDEC J-STD-020E standard-MSL, level 1.
- 3. Recommended products should be used within 12 months from the time of delivery.
- 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
 - 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
 - 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
 - 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

TAI-TECH


Impedance Frequency Characteristics(Typical)

KBM01-230200180 P10.

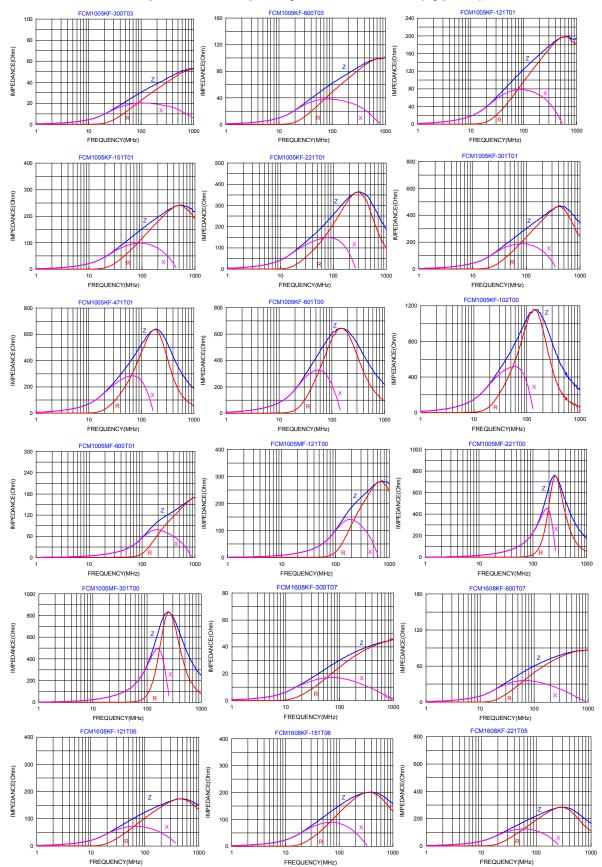


TAI-TECH KBM01-230200180 P11.

Impedance Frequency Characteristics(Typical)

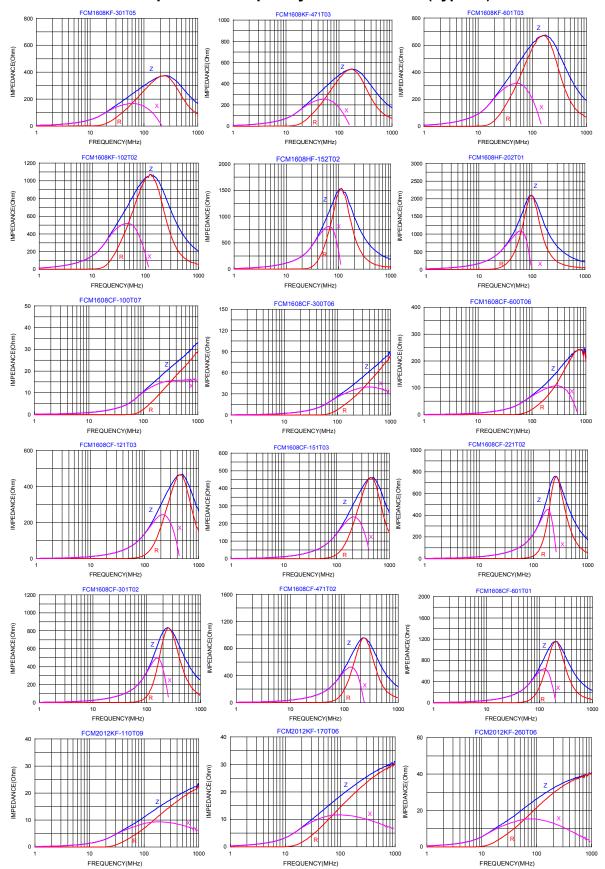


TAI-TECH KBM01-230200180 P12.

Impedance Frequency Characteristics(Typical)

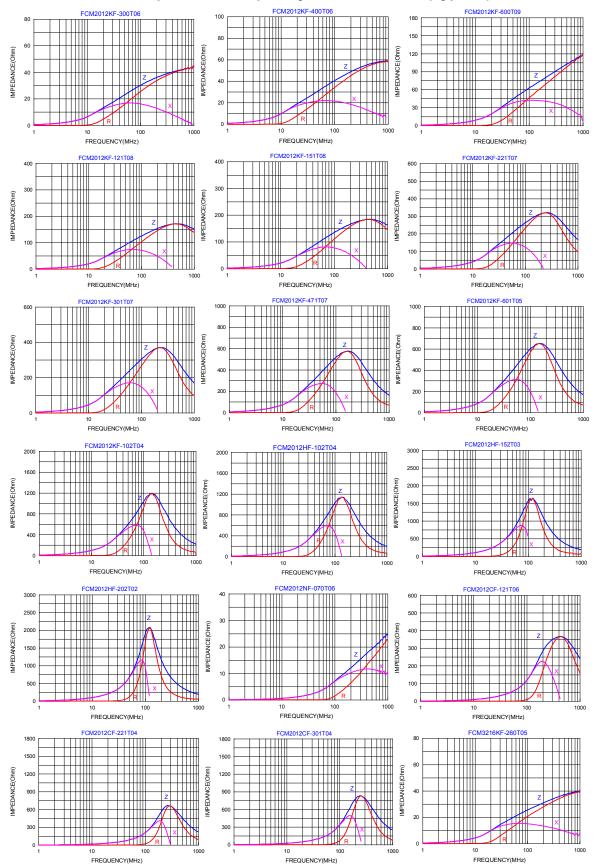

TAI-TECH KBM01-230200180 P13.

Impedance Frequency Characteristics(Typical)

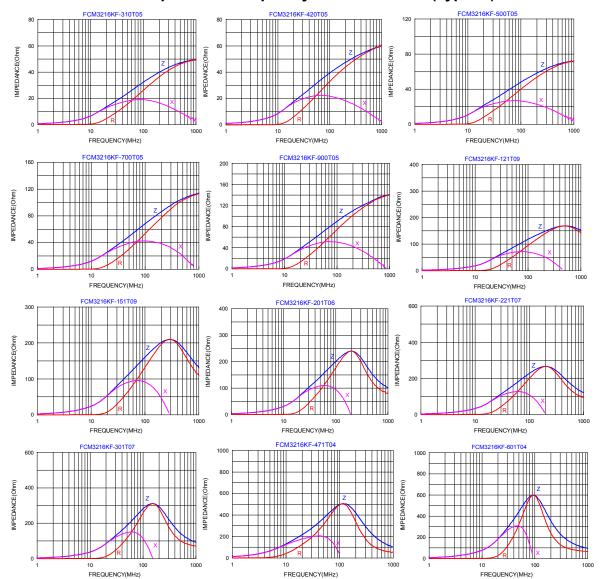





Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 1 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

以下測試樣品係由申請廠商所提供及確認 (The following sample(s) was/were submitted and identified by the applicant as):

樣品名稱(Sample Name) : FERRITE CHIP BEAD、FERRITE CHIP INDUCTOR、ARRAY、 MCF、 MCM 、

YMV SERIES

樣品型號(Style/Item No.) : FERRITE CHIP BEAD、FERRITE CHIP INDUCTOR、ARRAY、MCF、MCM、

YMV SERIES

收件日(Sample Receiving Date) : 29-Nov-2022

測試期間(Testing Period) : 29-Nov-2022 to 06-Dec-2022

測試需求(Test Requested) : 依據客戶要求進行測試,測試項目請參閱測試結果表格。(Testing item(s) is/are

specified by client. Please refer to result table for testing item(s).)

測試結果(Test Results) : 請參閱下一頁 (Please refer to following pages.)

Troy Chang / Department Manager Signed for and on behalf of SGS TAIWAN LTD.
Chemical Laboratory - Taipei



PIN CODE: 4545AB9D



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 2 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R、CHINA)

測試部位敘述 (Test Part Description)

No.1 : 整體混測 (MIXED ALL PARTS)

測試結果 (Test Results)

測試項目 (Test Items)	測試方法 (Method)	單位 (Unit)	MDL	結果 (Result)
鎘 (Cd) (Cadmium (Cd)) (CAS No.: 7440-43-9)	参考IEC 62321-5: 2013·以感應耦合電漿發射光 譜儀分析。(With reference to IEC 62321-5: 2013, analysis was performed by ICP-OES.)	mg/kg	2	No.1 n.d.
鉛 (Pb) (Lead (Pb)) (CAS No.: 7439-92-1)	參考IEC 62321-5: 2013·以感應耦合電漿發射光 譜儀分析。(With reference to IEC 62321-5: 2013, analysis was performed by ICP-OES.)	mg/kg	2	n.d.
汞 (Hg) (Mercury (Hg)) (CAS No.: 7439- 97-6)	參考IEC 62321-4: 2013+ AMD1: 2017‧以感應耦合電漿發射光譜儀分析。(With reference to IEC 62321-4: 2013+ AMD1: 2017, analysis was performed by ICP-OES.)	mg/kg	2	n.d.
六價鉻 Cr(VI) (Hexavalent Chromium Cr(VI)) (CAS No.: 18540-29-9)	參考IEC 62321-7-2: 2017·以紫外光-可見光分光 光度計分析。(With reference to IEC 62321-7-2: 2017, analysis was performed by UV-VIS.)	mg/kg	8	n.d.



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 3 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

測試項目	測試方法	單位	MDL	結果
(Test Items)	(Method)	(Unit)		(Result)
				No.1
一溴聯苯 (Monobromobiphenyl)		mg/kg	5	n.d.
二溴聯苯 (Dibromobiphenyl)		mg/kg	5	n.d.
三溴聯苯 (Tribromobiphenyl)		mg/kg	5	n.d.
四溴聯苯 (Tetrabromobiphenyl)		mg/kg	5	n.d.
五溴聯苯 (Pentabromobiphenyl)		mg/kg	5	n.d.
六溴聯苯 (Hexabromobiphenyl)		mg/kg	5	n.d.
七溴聯苯 (Heptabromobiphenyl)		mg/kg	5	n.d.
八溴聯苯 (Octabromobiphenyl)	☆ 老IFC (2221 C. 2015 - N/与 4 同时/学 /55 ** / 学 / / / / / / / / / / / / / / / /	mg/kg	5	n.d.
九溴聯苯 (Nonabromobiphenyl)		mg/kg	5	n.d.
十溴聯苯 (Decabromobiphenyl)		mg/kg	5	n.d.
多溴聯苯總和 (Sum of PBBs)	參考IEC 62321-6: 2015.以氣相層析儀/質譜儀分析。(With reference to IEC 62321-6: 2015,	mg/kg	-	n.d.
一溴聯苯醚 (Monobromodiphenyl ether)	analysis was performed by GC/MS.)	mg/kg	5	n.d.
二溴聯苯醚 (Dibromodiphenyl ether)	analysis was performed by GC/1813.)	mg/kg	5	n.d.
三溴聯苯醚 (Tribromodiphenyl ether)		mg/kg	5	n.d.
四溴聯苯醚 (Tetrabromodiphenyl ether)		mg/kg	5	n.d.
五溴聯苯醚 (Pentabromodiphenyl ether)		mg/kg	5	n.d.
六溴聯苯醚 (Hexabromodiphenyl ether)		mg/kg	5	n.d.
七溴聯苯醚 (Heptabromodiphenyl ether)		mg/kg	5	n.d.
八溴聯苯醚 (Octabromodiphenyl ether)		mg/kg	5	n.d.
九溴聯苯醚 (Nonabromodiphenyl ether)		mg/kg	5	n.d.
十溴聯苯醚 (Decabromodiphenyl ether)		mg/kg	5	n.d.
多溴聯苯醚總和 (Sum of PBDEs)		mg/kg	-	n.d.



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022

頁數(Page): 4 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R、CHINA)

測試項目	測試方法	單位	MDL	結果
(Test Items)	(Method)	(Unit)		(Result)
				No.1
鄰苯二甲酸丁苯甲酯 (BBP) (Butyl benzyl		mg/kg	50	n.d.
phthalate (BBP)) (CAS No.: 85-68-7)				
鄰苯二甲酸二丁酯 (DBP) (Dibutyl		mg/kg	50	n.d.
phthalate (DBP)) (CAS No.: 84-74-2)				
鄰苯二甲酸二(2-乙基己基)酯 (DEHP) (Di-		mg/kg	50	n.d.
(2-ethylhexyl) phthalate (DEHP)) (CAS				
No.: 117-81-7)				
鄰苯二甲酸二異丁酯 (DIBP) (Diisobutyl		mg/kg	50	n.d.
phthalate (DIBP)) (CAS No.: 84-69-5)				
鄰苯二甲酸二異癸酯 (DIDP) (Diisodecyl	参考IEC 62321-8: 2017,以氣相層析儀/質譜儀分	mg/kg	50	n.d.
phthalate (DIDP)) (CAS No.: 26761-40-	析。(With reference to IEC 62321-8: 2017,			
0, 68515-49-1)	analysis was performed by GC/MS.)			
鄰苯二甲酸二異壬酯 (DINP) (Diisononyl	analysis was performed by Ge, 1413.,	mg/kg	50	n.d.
phthalate (DINP)) (CAS No.: 28553-12-				
0, 68515-48-0)				
鄰苯二甲酸二正辛酯 (DNOP) (Di-n-octyl		mg/kg	50	n.d.
phthalate (DNOP)) (CAS No.: 117-84-0)				
鄰苯二甲酸二正戊酯 (DNPP) (Di-n-		mg/kg	50	n.d.
pentyl phthalate (DNPP)) (CAS No.:				
131-18-0)				
鄰苯二甲酸二正己酯 (DNHP) (Di-n-hexyl		mg/kg	50	n.d.
phthalate (DNHP)) (CAS No.: 84-75-3)				



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 5 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

測試項目 (Test Items)	測試方法 (Method)	單位 (Unit)	MDL	結果 (Result) No.1
六溴環十二烷及所有主要被辨別出的異構物(HBCDD) (α - HBCDD, β - HBCDD, γ - HBCDD) (Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified (α - HBCDD, β - HBCDD, γ - HBCDD)) (CAS No.: 25637-99-4, 3194-55-6 (134237-51-7, 134237-50-6, 134237-52-8))	參考IEC 62321-9: 2021.以氣相層析儀/質譜儀分析。(With reference to IEC 62321-9: 2021, analysis was performed by GC/MS.)	mg/kg	20	n.d.
氟 (F) (Fluorine (F)) (CAS No.: 14762-94-8)		mg/kg	50	n.d.
氯 (Cl) (Chlorine (Cl)) (CAS No.: 22537- 15-1)	参考BS EN 14582: 2016 · 以離子層析儀分析。		50	n.d.
溴 (Br) (Bromine (Br)) (CAS No.: 10097- 32-2)	(With reference to BS EN 14582: 2016, analysis was performed by IC.)	mg/kg	50	n.d.
碘 (I) (lodine (I)) (CAS No.: 14362-44-8)		mg/kg	50	n.d.
全氟辛烷磺酸及其鹽類 (PFOS and its salts) (CAS No.: 1763-23-1 and its salts)	参考CEN/TS 15968: 2010 · 以液相層析串聯質譜 儀分析。(With reference to CEN/TS 15968:	mg/kg	0.01	n.d.
全氟辛酸及其鹽類 (PFOA and its salts) (CAS No.: 335-67-1 and its salts)	2010, analysis was performed by LC/MS/MS.)	mg/kg	0.01	n.d.
聚氯乙烯 (Polyvinyl chloride) (PVC)	參考ASTM E1252: 2021·以傅立葉轉換紅外線光 譜儀及焰色法分析。(With reference to ASTM E1252: 2021, analysis was performed by FT-IR and Flame Test.)	**	-	Negative



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 6 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R、CHINA)

測試項目	測試方法	單位	MDL	結果
(Test Items)	(Method)	(Unit)		(Result)
				No.1
銻 (Sb) (Antimony (Sb)) (CAS No.: 7440-		mg/kg	2	n.d.
36-0)	A 字UC FDA 2052:1006 以咸œ细令廊路祭射火			
砷 (As) (Arsenic (As)) (CAS No.: 7440-	參考US EPA 3052: 1996,以感應耦合電漿發射光 譜儀分析。(With reference to US EPA 3052:	mg/kg	2	n.d.
38-2)	1996, analysis was performed by ICP-OES.)			
鈹 (Be) (Beryllium (Be)) (CAS No.: 7440-	1990, analysis was performed by ICF-OLS.)	mg/kg	2	n.d.
41-7)				

備註(Note):

- 1. mg/kg = ppm; 0.1wt% = 0.1% = 1000ppm
- 2. MDL = Method Detection Limit (方法偵測極限值)
- 3. n.d. = Not Detected (未檢出); 小於MDL / Less than MDL
- 4. "-" = Not Regulated (無規格值)
- 5. **= Qualitative analysis (No Unit) 定性分析(無單位)
- 6. Negative = Undetectable 陰性(未偵測到); Positive = Detectable 陽性(已偵測到)
- 7. 全氟辛烷磺酸及其鹽類包含等物質 (PFOS and its salts including):
 CAS No.: 1763-23-1, 2795-39-3, 29457-72-5, 29081-56-9, 70225-14-8, 56773-42-3, 251099-16-8, 307-35-7, 91036-71-4, 4021-47-0 and others.
- 8. 全氟辛酸及其鹽類包含等物質 (PFOA and its salts including): CAS No.: 335-67-1, 335-95-5, 2395-00-8, 335-93-3, 335-66-0, 3825-26-1 and others.
- 9. 樣品的測試是基於申請人要求混合測試‧報告中的混合測試結果不代表其中個別單一材質的含量。
 The sample(s) was/were analyzed on behalf of the applicant as mixing sample in one testing. The above result(s) was/were only given as the informality value.



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022

頁數(Page): 7 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)


江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

重金屬流程圖 / Analytical flow chart of heavy metal

根據以下的流程圖之條件,樣品已完全溶解。(六價鉻測試方法除外)

These samples were dissolved totally by pre-conditioning method according to below flow chart. (Cr^{6+} test method excluded)

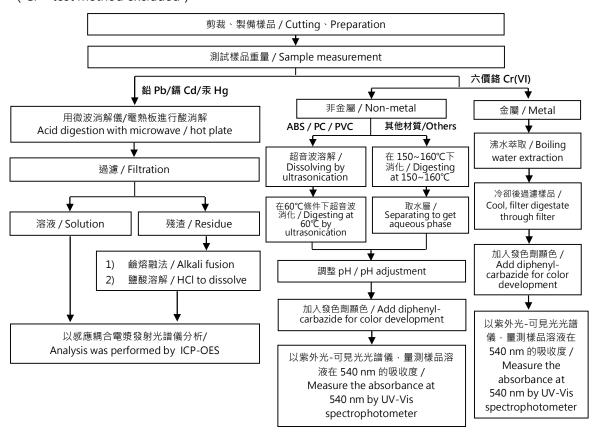



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022

頁數(Page): 8 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

多溴聯苯/多溴聯苯醚分析流程圖 / Analytical flow chart - PBBs/PBDEs

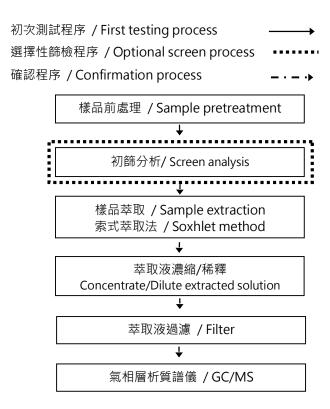



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 9 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

可塑劑分析流程圖 / Analytical flow chart - Phthalate

【測試方法/Test method: IEC 62321-8】

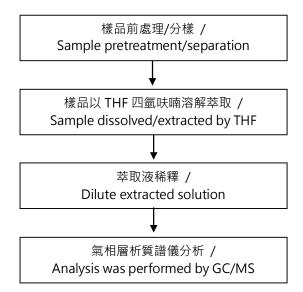



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 10 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R,CHINA)

六溴環十二烷分析流程圖 / Analytical flow chart - HBCDD

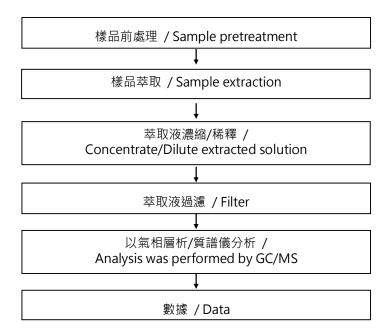

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Member of the SGS Group



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 11 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R,CHINA)

鹵素分析流程圖 / Analytical flow chart - Halogen

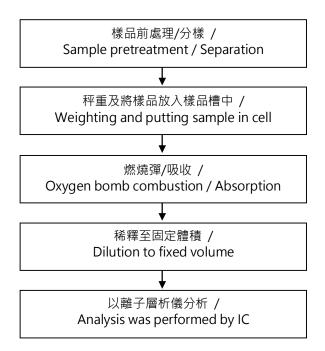

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com.tw/terms-of-service. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Member of the SGS Group



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 12 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R、CHINA)

全氟化合物(包含全氟辛酸/全氟辛烷磺酸/其相關化合物等等)分析流程圖 / Analytical flow chart – PFAS (including PFOA/PFOS/its related compound, etc.)

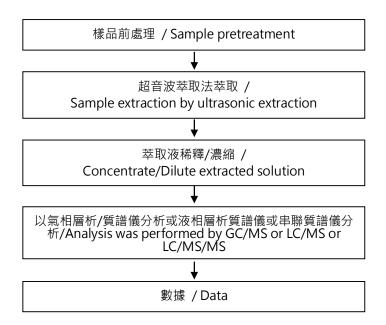



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 13 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)


慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)

中國,江蘇省,宿遷市,泗洪縣,經濟開發區杭州路南側,建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD,ECONOMIC DEVELOPMENT ZONE,SIHONG COUNTY,SUQIANCITY,JIANGSU PROVINCE,P,R,CHINA)

聚氯乙烯物質判定分析流程圖 / Analysis flow chart - PVC

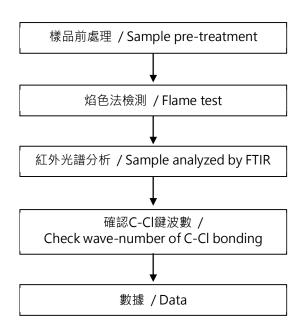



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022

頁數(Page): 14 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)

桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)


中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

元素(含重金屬)分析流程圖 / Analytical flow chart of elements (Heavy metal included)

根據以下的流程圖之條件,樣品已完全溶解。

These samples were dissolved totally by pre-conditioning method according to below flow chart.

【參考方法/Reference method: US EPA 3051A、US EPA 3052】

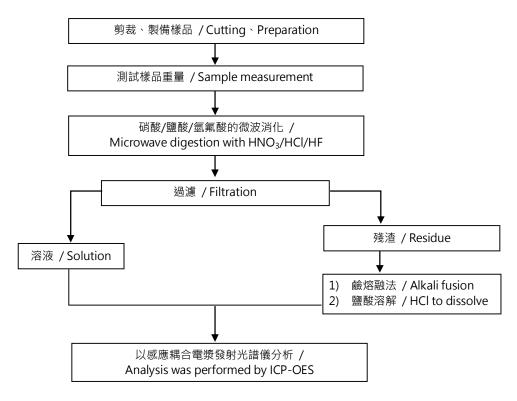

^{*} US EPA 3051A 方法未添加氫氟酸 / US EPA 3051A method does not add HF.



Test Report

號碼(No.): ETR22B04558 日期(Date): 06-Dec-2022 頁數(Page): 15 of 15

西北臺慶科技股份有限公司 (TAI-TECH ADVANCED ELECTRONICS CO., LTD.)

臺慶精密電子(昆山)有限公司 (TAI-TECH ADVANCED ELECTRONICS (KUN-SHAN) CO. LTD.)

慶邦電子元器件 (泗洪) 有限公司 (TAIPAQ ELECTRONICS (SI-HONG) CO., LTD.)


桃園市楊梅區幼獅工業區幼四路1號 (NO. 1, YOU 4TH ROAD, YOUTH INDUSTRIAL DISTRICT, YANG-MEI, TAO-YUAN CITY, TAIWAN R. O. C.)

江蘇省昆山市篷朗昆嘉高科技工業區郭澤路 (GUO-ZE ROAD, KUNJIA HI-TECH INDUSTRIAL PARK, KUN-SHAN, JIANG-SU, CHINA)


中國·江蘇省·宿遷市·泗洪縣·經濟開發區杭州路南側·建設北路東側 (THE SOUTH HANGZHOU ROAD AND THE EAST JIANSHE ROAD · ECONOMIC DEVELOPMENT ZONE · SIHONG COUNTY · SUQIANCITY · JIANGSU PROVINCE · P,R · CHINA)

* 照片中如有箭頭標示,則表示為實際檢測之樣品/部位. * (The tested sample / part is marked by an arrow if it's shown on the photo.)

ETR22B04558

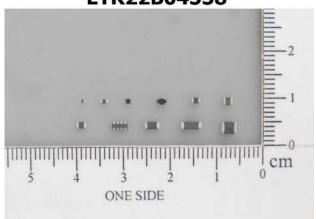

ETR22B04558

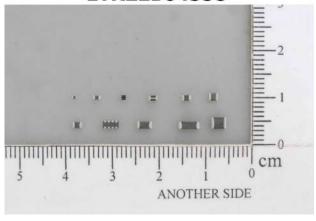

** 報告結尾 (End of Report) **