

www.Jameco.com + 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 364744 (9357-04)

High Current / High Density .165" (4.2mm) Housings

- UL 94V-2 nylon 66
- Available in 2 to 24 circuit
- Insulation Resistance: 1000MΩ min.
- Dielectric strength: 1500V AC

9357-N Series Receptacle Housing

- Positive housing locks
- Fully isolated terminals
- · Low engagement force terminals

165


- 14.9


421

Wire to wire


- · Wire to board (vertical header)
- Wire to board (right angle header)

inches mm

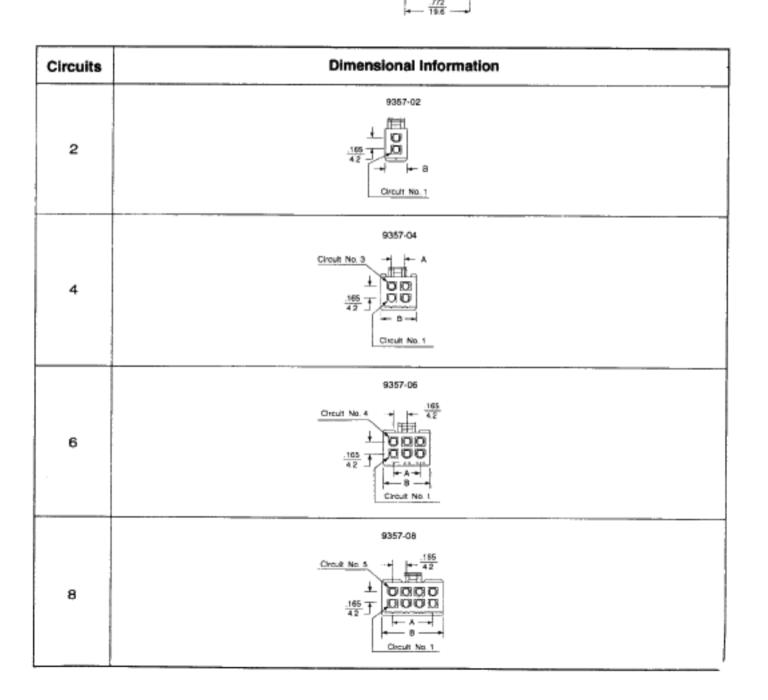

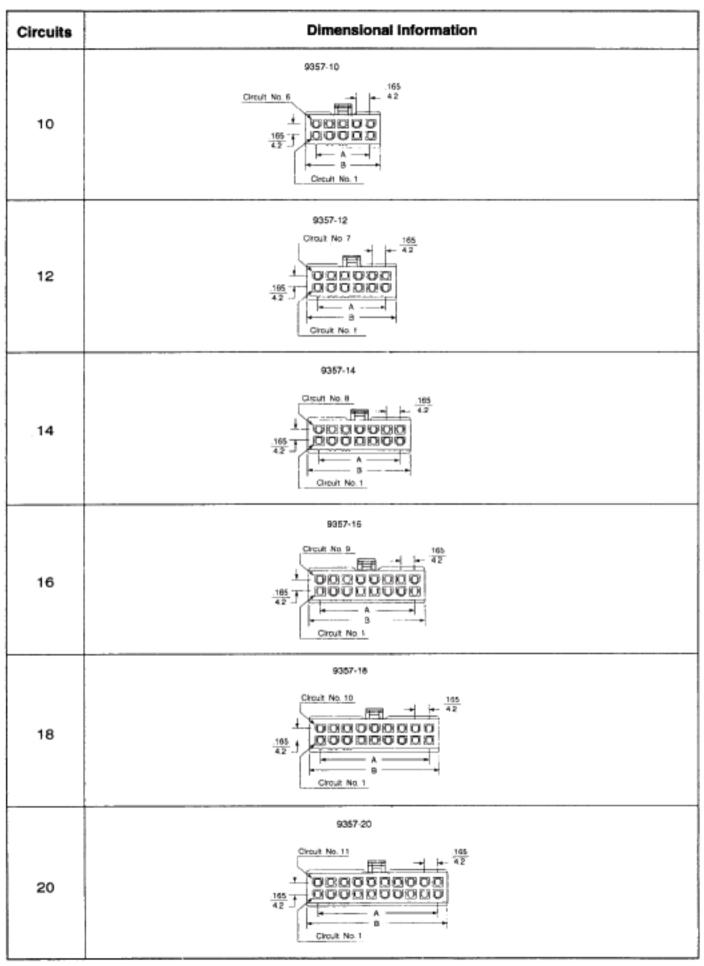

.

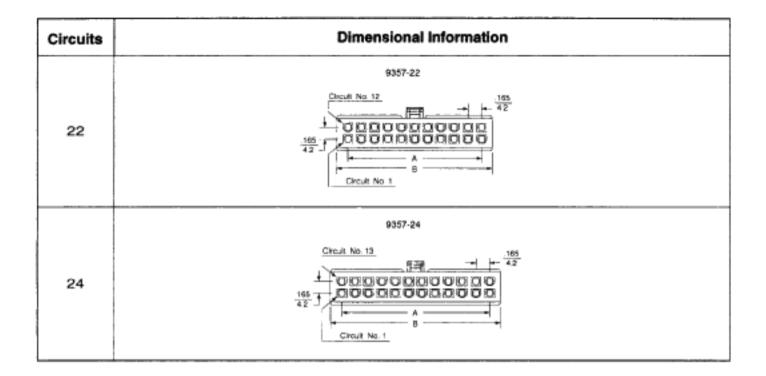

Dimensional Information - in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim, B
2		.213 (5.4)	14	.992 (25.2)	1.205 (30.6)
4	.165 (4.2)	.378 (9.6)	16	1.157 (29.4)	1.370 (34.8)
6	.331 (8.4)	.543 (13.8)	18	1.323 (33.6)	1.535 (39.0)
8	.496 (12.6)	.709 (18.0)	20	1.488 (37.8)	1.701 (43.2)
10	.681 (16.8)	.874 (22.2)	22	1.654 (42.0)	1.866 (47.4)
12	.827 (21.0)	1.039 (26.4)	24	1.819 (46.2)	2.031 (51.6)

· Current Rating & Wire Size:

Wire Size AWG	Rated Voltage	Circuits				
		2	4 - 6	8 ~ 10	12-24	
# 18	250V	9A	8A	7A.	6A	
# 20		7A	6A	5A	5A	
# 22		5A	4A.	4A.	4A	
# 24		4A	3A	3A.	3A	