


SMALL INSULATION CRIMP

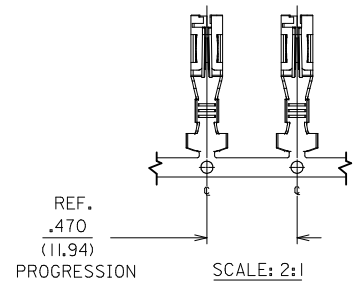

NOTES:

1. SINGLE CRIMP TO #16 & #14 AWG WIRE, WITH .031/(0.79) MAXIMUM INSULATION THICKNESS.
2. MATERIAL: .012/(0.30) THICK C26000 BRASS.
3. FINISH: HOT TIN DIP.
4. PRODUCT SPECIFICATION : PS-4444I-9999.
5. NO PORTION OF ONE LOCK TANG BEAM SHALL TOUCH ANY PORTION OF THE OTHER LOCK TANG BEAM.

CORRECT TOLERANCE EC NO: UCP2014-5466 DRWN:JDOX 2014/07/09 CHKD:ANDERSON 2014/07/09 APPR:FSMITH 2014/07/17	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 10:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.25 ± --- 0 PLACE ± ±	mm INCH	DRAWN BY MAB	DATE 05/08/94	TITLE TERMINAL, RECEPTACLE .125/(3.18) X .020/(.51) FLAT BLADE SYSTEM - TPA			
		ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHECKED BY KBP	DATE 05/08/94	molex			
		MATERIAL NO. 433750001		APPROVED BY RAS	DATE 05/08/94	DOCUMENT NO. SD-43375-0001	SHEET NO. 1 OF 1		