





**PLCC Sockets — (HPT) with Solder Tails (Continued)**



Square



Rectangular

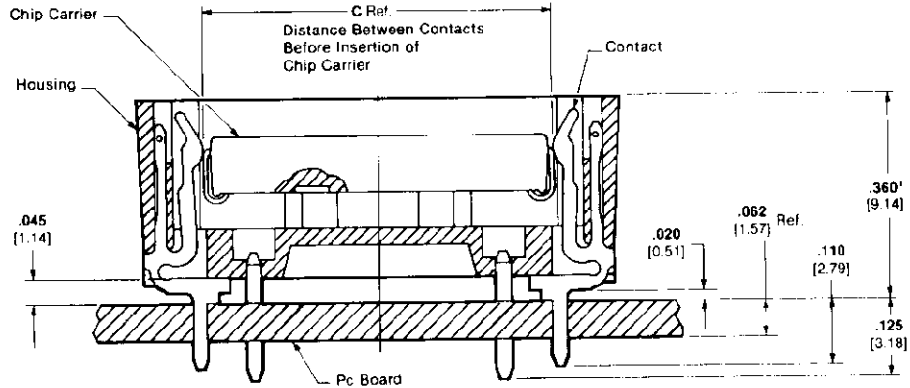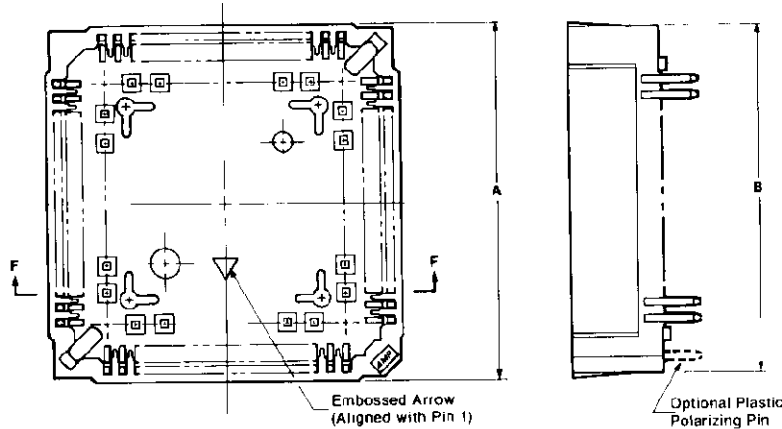


Cross-Section F - F

**Materials and Finish**

**Housing Material** — PPS or PCT, UL 94V-0 rated

**Contacts** — Phosphor bronze

**Plating** — .000150 [0.00381] min. tin lead (93/7) over .000040 [0.00102] min. nickel



No. of Pos.	Package Configuration	Dimensions			.056 - .075' [1.40 - 1.91]	PLCC Dim. D		With Plastic Polarizing Pin
		A	B	C		.055 - .075' [1.40-1.91]	.070 - .090' [1.78 2.29]	
20	Square	.585 14.86	.570 14.48	.354 8.99	821815-1	3-821815-1	---	
28	Square	.685 17.40	.670 17.02	.454 11.53	821581-1	3-821581-1	821581-3	
32	Rectangular*	See Below			821665-1	3-821665-1	---	
44	Square	.885 22.48	.870 22.10	.654 16.61	821575-1	3-821575-1	821575-3	
52	Square	.985 25.02	.970 24.64	.754 19.15	821551-1	3-821551-1	821739-3	
68	Square	1.185 30.10	1.170 29.72	.954 24.23	821574-1	3-821574-1	821574-3	
84	Square	1.385 35.18	1.370 34.80	1.154 29.3*	821573-1	3-821573-1	821573-3	

\*Packaged in trays.  
\*Packaged in tubes.

**\*32 Position Rectangular Dimensions**

A		B		C	
Long Side	Short Side	Long Side	Short Side	Long Side	Short Side
.785	.685	.770	.670	.554	.454
19.94	17.40	19.56	17.02	14.07	11.53

.330 [8.38] for 32-position rectangular socket.