
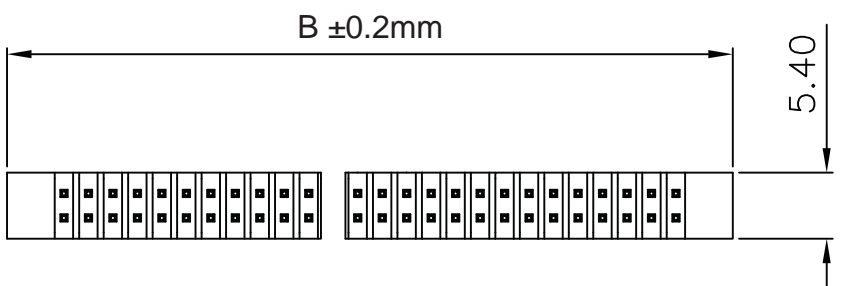
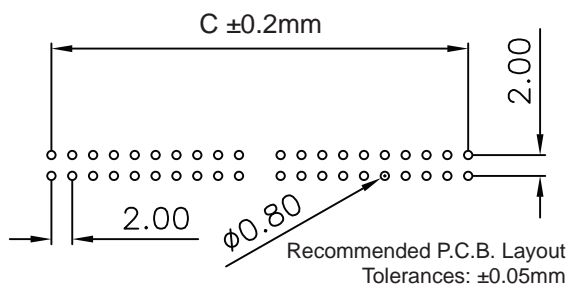



Pin No.	A	B	C
10	16.3	17.3	8.0
14	20.3	21.3	12.0
16	22.3	23.3	14.0
20	26.3	27.3	18.0
24	30.3	31.3	22.0
26	32.3	33.3	24.0
30	36.3	37.3	28.0
34	40.3	41.3	32.0
40	46.3	47.3	38.0
50	56.3	57.3	48.0
60	66.3	67.3	58.0
64	70.3	71.3	62.0

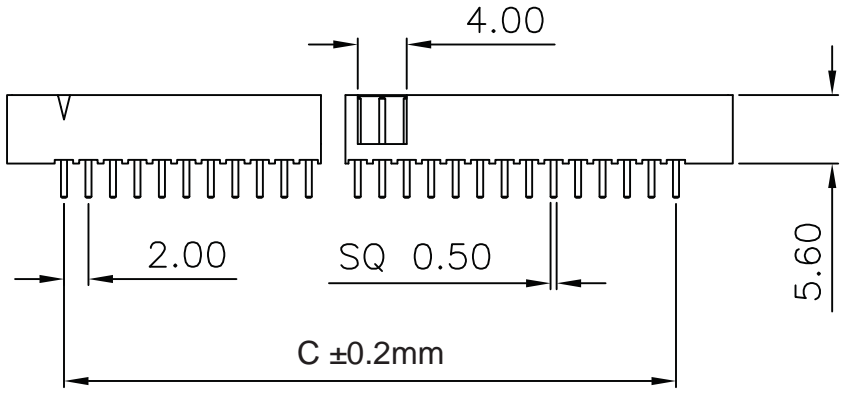

**Material:**

- Insulator: Polyester, (UL94V-0)
- Insulator Standard: Nylon-6T
- Contact: Brass
- Contact Plating: Gold Flash

**Electrical:**

- Current Rating: 2A
- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 5,000MΩ Min.
- Dielectric Withstanding: AC 500V
- Operation Temperature: -40°C to +105°C

Order Code: AWHW2-xxG-0202-T-R

Order pin number: 10,14,16, 20,24,26,30,34,40,50,60,64

Scale	Free	Date		Name		Title	
TOLERANCE		Drawn	03.04.13	Wilson		Boxheader - Low Profile	
X.X	±0.3	Approved	03.04.13	Groll		10-64 pin, straight pin, 2.00mm pitch	
X.XX	±0.20					ASSMANN WSW-No.	
X.XXX	±0.100					AWHW2-xxG-0202-T-R	
DIM	TOL					Drawing-No.	
X.°	±X°					rev00	
X.X°	±X°					Replace	
Angle	TOL	Id.	Modification	Date	Name	Sheet	
						1/1	

Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@assmann.us