




Class I Ceramic Disc Capacitors (RoHS Compliant) CDR Series

FEATURES


- Linear temperature coefficient of capacitance
- High stability of capacitance
- Low loss across a wide frequency range



CHARACTERISTICS

Item	Characteristics
Operating Temperature Range	-25°C ~ +85°C
Capacitance Tolerance (min.)	Within the tolerance at 1MHz, 1~3Vrms, 25°C
Working Voltage (WVDC)	50WV or 500WV
Insulation Resistance	10,000MΩ min.
Test Voltage	3 x WVDC
Life Test	At 2 x WVDC @85°C for 1000 hours @ 85°C, capacitors shall meet the following: the capacitance change for ≤30pF will be ≤±5% or ≤0.3pF; for >30pF the capacitance change will be ≤±3%. For ≤30pF Q ≥ 275 = 5/3C; for >30pF Q ≥ 350
Humidity Test	At exposure in the ambient temperature of 40°C, and at 95% RH for 500 hours the capacitors shall meet the following after 24 hours exposure at room temperature: the capacitance change for ≤30pF will be ≤±5% or ≤0.3pF; for >30pF the capacitance change will be ≤±5%. For ≤30pF Q ≥ 275 = 5/3C; for >30pF Q ≥ 350

PART NUMBERING SYSTEM



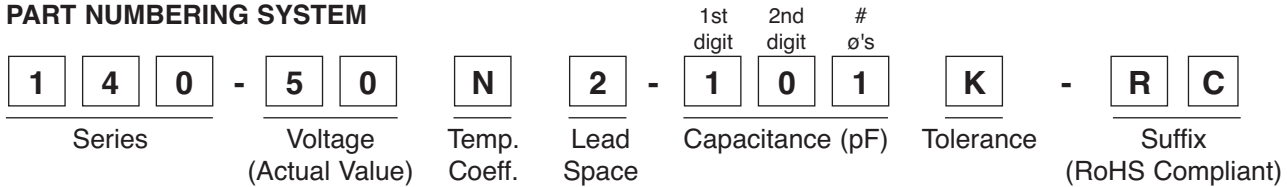


Temp. Coeff.	Code
NPO	N
N750	E
SL	S

Lead Space	Code
2.5mm	2
5.0mm	5

Tolerance	Code	Tolerance	Code
±0.25pF	C	±20%	M
±5%	J	±0.5pF	D
±10%	K	+80/-20%	Z

DIMENSIONS (mm), CAPACITANCE RANGES (pF), TYPICAL TEMPERATURE CHARACTERISTICS

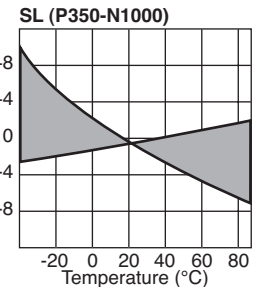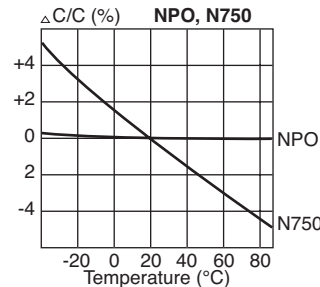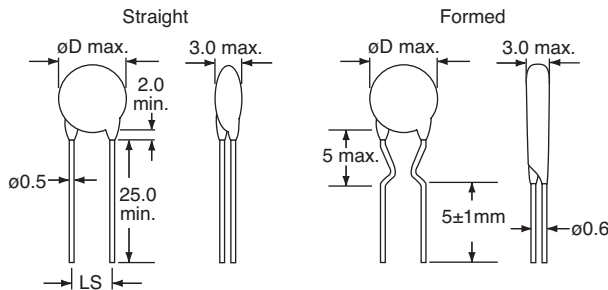

Dimensions		Working Voltage (WV); Temperature Coefficient; Capacitance Range (pF)					
		50/100			500		
øD (mm)	LS (mm)	NPO	N750	SL	NPO	N750	SL
5	2.5/5.0	1 ~ 47	22 ~ 47	50 ~ 150	---	---	39 ~ 100
6	2.5/5.0	56 ~ 68	---	180 ~ 220	1-36	18 ~ 33	120 ~ 150
7.5	2.5/5.0	82 ~ 100	---	250 ~ 330	39 ~ 82	39 ~ 68	180 ~ 220
8.5	2.5/5.0	120 ~ 150	---	390 ~ 470	---	---	270 ~ 300
9.5	5.0	180 ~ 200	---	500 ~ 680	---	---	300 ~ 390
10.5	5.0	220 ~ 270	---	820	100	---	400 ~ 470
12.5	5.0	300 ~ 330	---	---	---	---	560



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Xicon:

[140-50N5-470J-TB](#) [140-50N2-100J-TB-RC](#) [140-50N2-101J-TB-RC](#) [140-50N2-120J-TB-RC](#) [140-50N2-150J-TB-RC](#)
[140-50N2-180J-TB-RC](#) [140-50N2-1R0C-TB-RC](#) [140-50N2-200J-TB-RC](#) [140-50N2-220J-TB-RC](#) [140-50N2-270J-TB-RC](#)
[140-50N2-2R2C-TB-RC](#) [140-50N2-300J-TB-RC](#) [140-50N2-390J-TB-RC](#) [140-50N2-470J-TB-RC](#) [140-50N2-4R7C-TB-RC](#)
[140-50N2-560J-TB-RC](#) [140-50N2-680J-TB-RC](#) [140-50N2-820J-TB-RC](#) [140-50N5-100J-TB-RC](#) [140-50N5-101J-TB-RC](#)
[140-50N5-120J-TB-RC](#) [140-50N5-121J-TB-RC](#) [140-50N5-150J-TB-RC](#) [140-50N5-151J-TB-RC](#) [140-50N5-180J-TB-RC](#)
[140-50N5-181J-TB-RC](#) [140-50N5-1R0D-TB-RC](#) [140-50N5-200J-TB-RC](#) [140-50N5-220J-TB-RC](#) [140-50N5-221J-TB-RC](#)
[140-50N5-270J-TB-RC](#) [140-50N5-271J-TB-RC](#) [140-50N5-2R2D-TB-RC](#) [140-50N5-300J-TB-RC](#) [140-50N5-330J-TB-RC](#)
[140-50N5-390J-TB-RC](#) [140-50N5-470J-TB-RC](#) [140-50N5-4R7D-TB-RC](#) [140-50N5-560J-TB-RC](#) [140-50N5-680J-TB-RC](#)
[140-50N5-820J-TB-RC](#) [140-50S2-101J-RC](#) [140-100N2-100J-RC](#) [140-100N2-150J-RC](#) [140-100N2-1R0D-RC](#)
[140-100N2-200J-RC](#) [140-100N2-2R2D-RC](#) [140-100N2-4R7D-RC](#) [140-100N5-101J-RC](#) [140-100N5-220J-RC](#)
[140-100N5-270J-RC](#) [140-100N5-300J-RC](#) [140-100N5-330J-RC](#) [140-100N5-390J-RC](#) [140-100N5-470J-RC](#)
[140-100N5-560J-RC](#) [140-100N5-680J-RC](#) [140-102S6-221K-RC](#) [140-500N2-100J-RC](#) [140-500N2-120J-RC](#)
[140-500N2-1R0C-RC](#) [140-500N2-2R2C-RC](#) [140-500N2-4R7C-RC](#) [140-500N2-5R6D-RC](#) [140-500N2-6R8D-RC](#)
[140-500N2-8R2D-RC](#) [140-500N5-101J-RC](#) [140-500N5-150J-RC](#) [140-500N5-180J-RC](#) [140-500N5-200J-RC](#) [140-500N5-220J-RC](#)
[140-500N5-270J-RC](#) [140-500N5-330J-RC](#) [140-500N5-390J-RC](#) [140-500N5-470J-RC](#) [140-500N5-560J-RC](#)
[140-500N5-680J-RC](#) [140-500N5-820J-RC](#) [140-500S5-101K-RC](#) [140-500S5-121K-RC](#) [140-500S5-221K-RC](#)
[140-500S5-470K-RC](#) [140-500S5-560K-RC](#) [140-500S5-680K-RC](#) [140-500S5-820K-RC](#) [140-50N2-150J-RC](#) [140-50N2-180J-RC](#)
[140-50N2-220J-RC](#) [140-50N2-270J-RC](#) [140-50N2-390J-RC](#) [140-50N2-560J-RC](#) [140-50N2-680J-RC](#)
[140-50N2-820J-RC](#) [140-50N5-100J-RC](#) [140-50N5-101J-RC](#) [140-50N5-120J-RC](#) [140-50N5-121J-RC](#) [140-50N5-151J-RC](#)
[140-50N5-181J-RC](#) [140-50N5-1R0D-RC](#)