
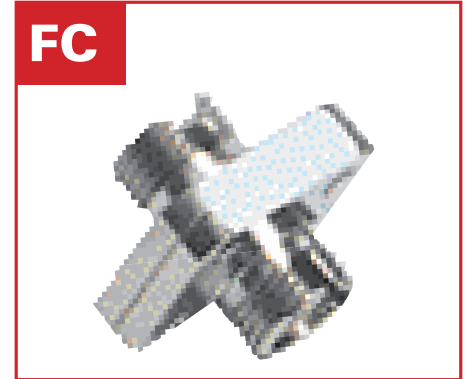


## FIS BULKHEAD ATTENUATORS

### Features

- Utilizes filter technology
- Vibration and temperature resistant
- Individually labeled
- Four attenuation levels available

Fiber Instrument Sales, Inc. (FIS) introduces ST, FC and SC style bulkhead attenuators designed to provide 5, 10, 15 or 20dB attenuation in your fiber optic system. Bulkhead attenuators are compatible with standard industry connectors and are ideal for 1310 or 1550 singlemode applications. FIS Bulkhead Attenuators are available in stock for immediate delivery at a low price.

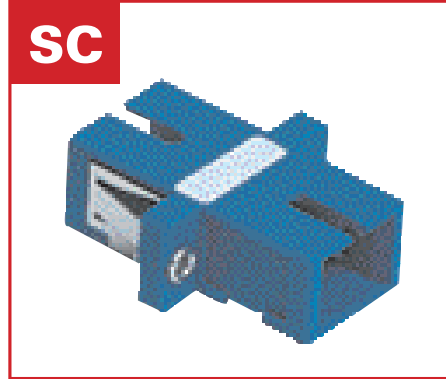

### WAVELENGTHS

#### 1310 nm:

ST	SC	FC
F1-8121S - 5dB	F1-8321S - 5dB	F1-8221S - 5dB
F1-8122S - 10dB	F1-8322S - 10dB	F1-8222S - 10dB
F1-8123S - 15dB	F1-8323S - 15dB	F1-8223S - 15dB
F1-8124S - 20dB	F1-8324S - 20dB	F1-8224S - 20dB

#### 1550 nm:

ST	SC	FC
F1-8125S - 5dB	F1-8325S - 5dB	F1-8225S - 5dB
F1-8126S - 10dB	F1-8326S - 10dB	F1-8226S - 10dB
F1-8127S - 15dB	F1-8327S - 15dB	F1-8227S - 15dB
F1-8128S - 20dB	F1-8328S - 20dB	F1-8228S - 20dB

### SPECIFICATIONS

<b>Styles Available</b>	ST, FC and SC
<b>Wavelength</b>	1310nm or 1550nm
<b>Environmental</b>	
Operating Temperature	-40 to +75oC
Thermal Stability	+/- .5dB
<b>Attenuation Levels</b>	5dB +/- 1.0
	10dB +/- 1.0
	15dB +/- 1.5
	20dB +/- 1.5
<b>Repeatability</b>	+/- .6dB
<b>Return Loss</b>	PC connectors <-24dB UPC connectors <-45dB

\*UPC Return Loss is a factor of connector performance.



# 1.800.5000.FIS

161 Clear Road • Oriskany, NY 13424  
Tel: 315.736.2206 • Fax: 315.736.2285  
info@fiberinstrumentsales.com  
www.fiberinstrumentsales.com

