
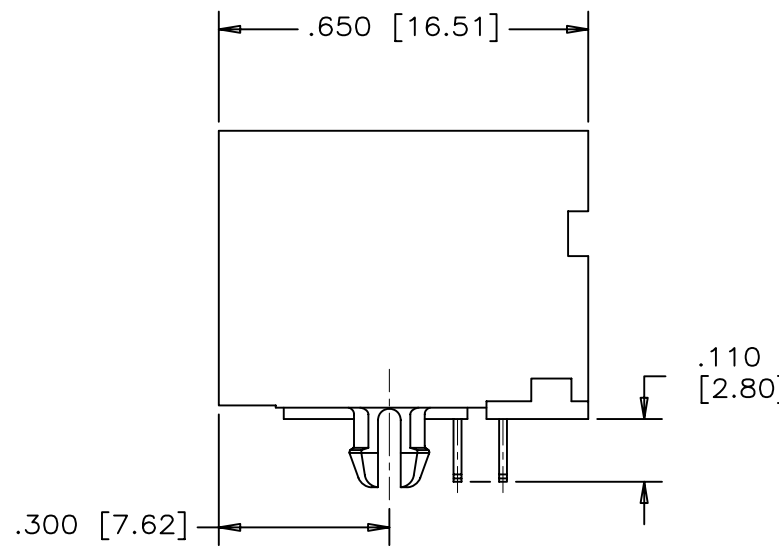


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	Mar.29/06	L.CHAN

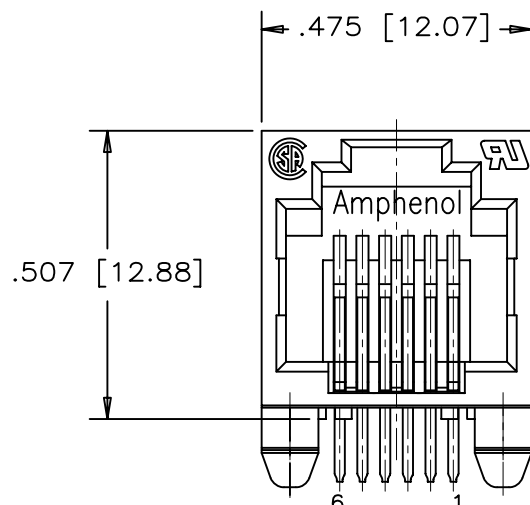


**MATERIALS:**

**PLASTIC HOUSING:** HIGH TEMPERATURE RESISTANT NYLON  
UL FLAMMABILITY RATING 94V-0.  
INFRA-RED OVEN COMPATIBLE


**CONTACTS:** PHOSPHOR BRONZE

**CONTACT PLATING:** 50 MICROINCHES [1.27 MICRONS] MINIMUM NICKEL.  
50 MICROINCHES [1.27 MICRONS] MINIMUM GOLD  
ON MATING SURFACES  
100 MICROINCHES [2.54 MICRONS] MATTE TIN  
ON CONTACT TAILS.

**RECOMMENDED SOLDERING TEMPERATURE:**  
WAVE SOLDERING OR REFLOW SOLDERING AT 260°C  
MAXIMUM FOR 5 SEC MAXIMUM.

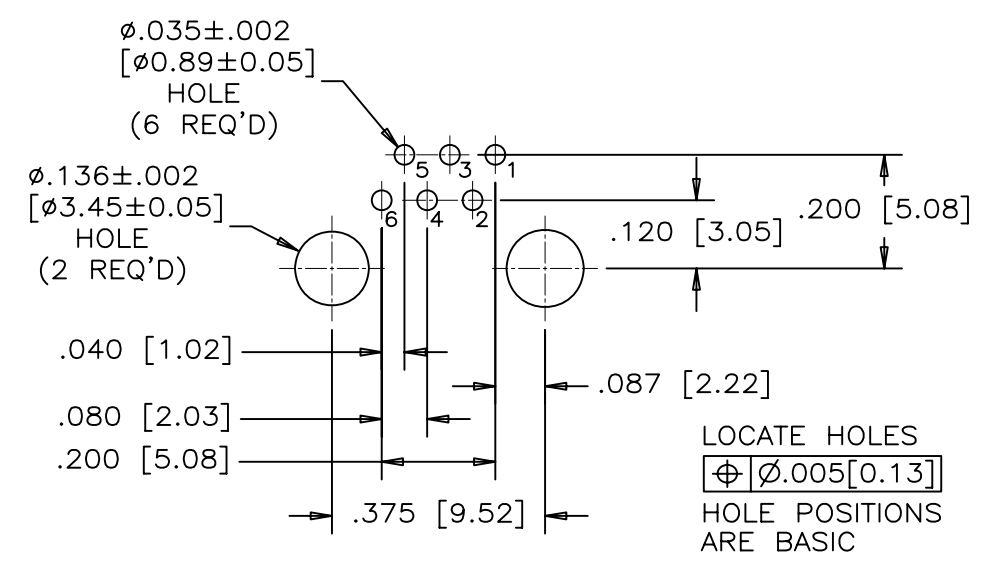

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

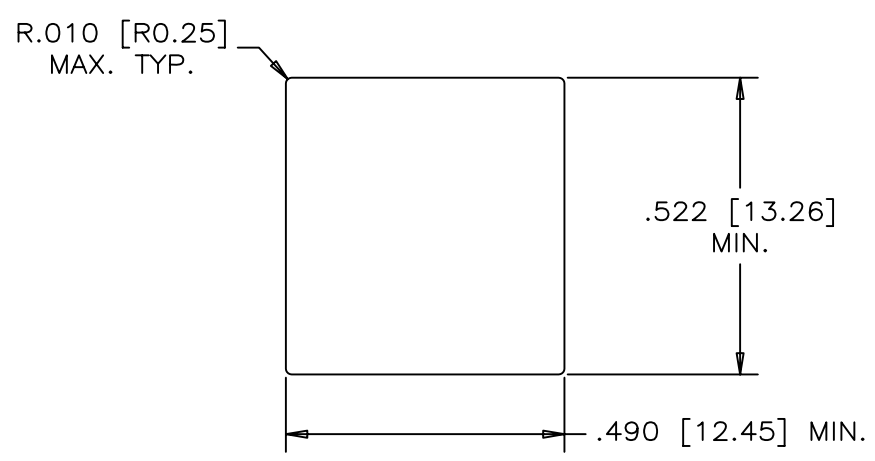

RECOMMENDED PANEL CUTOUT

PART NUMBER: RJE01-6X0-01

CONTACT QTY.  
2=2 CONTACTS  
4=4 CONTACTS  
6=6 CONTACTS

DRAWN PAUL WANG	DATE 06/03/29	Amphenol Canada Corp.		
DESIGNED				
CHECKED CHIGOW	DATE 06/03/29	TITLE HIGH SPEED MODULAR JACK,1 PORT, 6 POSITIONS,OPTIONAL CONTACTS, WITHOUT SHIELD - RoHS COMPLIANT		
I. E. APPRD.		DWG C	DRAWING NO. P-RJE01-6X0-01	REV. A
Q. A. APPRD.				
DWG. APPRD.		SCALE		
ENG. REL. NO.		WT. -----	SURF. -----	SHEET 1 OF 1
REF.				
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.