





Specification Status: Released

Electrical Rating

Voltage: 60V MAX
Current: 40A MAX

Insulating Material:
Cured, Flame Retardant Epoxy Polymer

Lead Material:
20 AWG Tin Plated Copper

Marking:
 Manufacturer's Mark and Voltage
 60
 KF185 — Part Identification
 Lot Identification (can be on back)

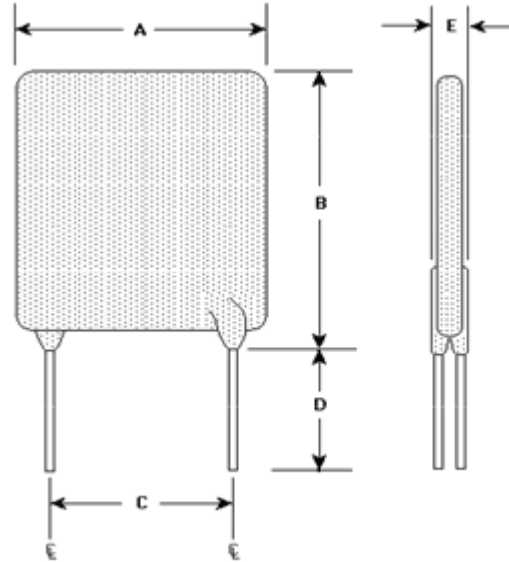


TABLE I. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	13.0	---	18.8	4.32	5.84	7.6	---	---	3.81
in*:	--	(0.51)	---	(0.74)	(0.17)	(0.23)	(0.3)	---	---	(0.15)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD	AMPERES AT 20°C TRIP	OHMS AT 20°C MIN	OHMS AT 20°C MAX	SECONDS AT 20°C, 9.25A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
1.85	1.85	3.70	0.06	0.152	12.6	0.25	2.6

Agency Recognitions: UL, TUV, CSA
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant

