


SLW-120-01-T-S

CES-115-01-T-S

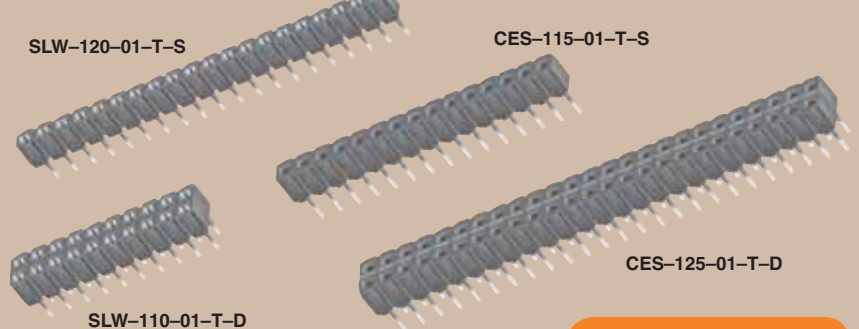

SLW-110-01-T-D

CES-125-01-T-D

SLW, CES SERIES

(2,54 mm) .100"

LOW PROFILE SOCKET STRIPS

SPECIFICATIONS

For complete specifications see www.samtec.com?SLW or www.samtec.com?CES

Insulator Material:

Black G.F. Polyester

Contact Material:

Phosphor Bronze

Plating: Au or Sn over

50µ" (1,27 µm) Ni

SLW Current Rating (SLW/TSW):

5,2 A per pin

(1 pin powered per row)

CES Current Rating (TSW/CES):

5,5 A per pin

(1 pin powered per row)

Voltage Rating:

SLW: 50 VAC

CES: 400 VAC

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Contact Resistance:

10 mΩ

Insertion Depth:

SLW: (2,16 mm) .085" to

(2,92 mm) .115"

CES: (2,62 mm) .103" to

(4,06 mm) .160"

Insertion Force:

SLW: (Single contact only)

(3,34 N) 12 oz avg.

(0,64 mm) .025" SQ pin

CES: (Single contact only)

(2,22 N) 8 oz avg.

(0,64 mm) .025" SQ pin

Withdrawal Force:

SLW: (Single contact only)

(1,67 N) 6 oz avg.

(0,64 mm) .025" SQ pin

CES: (Single contact only)

(1,11 N) 4 oz avg.

(0,64 mm) .025" SQ pin

RoHS Compliant:

Yes

Lead-Free Solderable:

Wave only

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)


- Other platings
- Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.

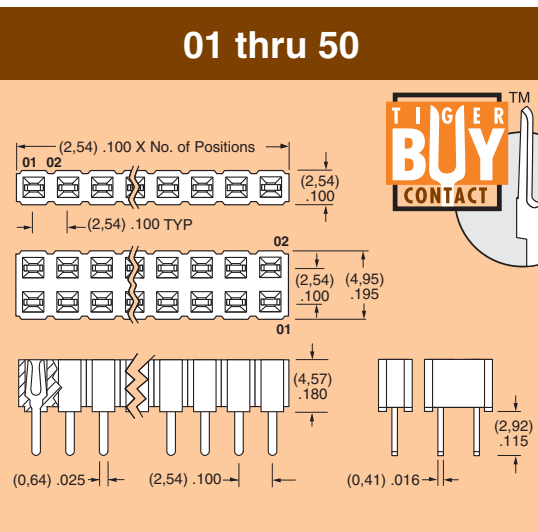


- S = Single Row
- D = Double Row
- F = Gold flash on contact, Matte Tin on tail
- L = 10µ" (0,25 µm) Gold on contact, Matte Tin on tail
- G = 20µ" (0,51 µm) Gold on contact, Gold flash on balance
- T = Matte Tin

Mates with:
TLW, TSW, MTLW, MTSW, HW, EW, ZW, HTSW, HMTSW, TSM

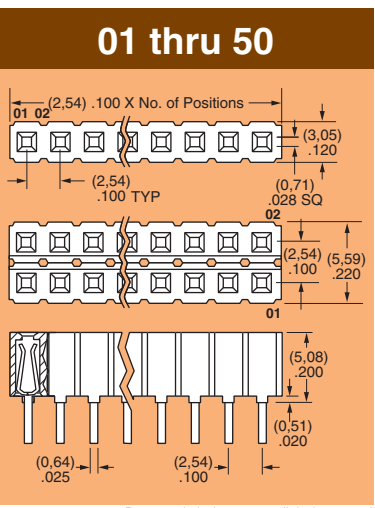

- 01 = (3,25 mm) .128 "A" Dim.
- 02 = (5,66 mm) .223 "A" Dim.
- L = 10µ" (0,25 µm) Gold contact, Matte Tin on tail
- T = Matte Tin
- S = Single Row
- D = Double Row
- RA = Right Angle version
- Style -02 only Single Row only

Mates with:
TLW, TSW, MTLW, MTSW, HW, EW, ZW, DW, HTSW, PHT, HMTSW



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM