

SSQ-115-04-L-T

**(2,54mm) .100"**  
**SSW, SSQ SERIES**

# THROUGH-HOLE .025" SQ POST SOCKET

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SSW](http://www.samtec.com?SSW) or [www.samtec.com?SSQ](http://www.samtec.com?SSQ)


**Insulator Material:**  
 Black Liquid Crystal Polymer (-S & -D) or Black High Temperature Thermoplastic (-T)  
**Contact Material:**  
 Phosphor Bronze  
**Plating:**  
 Au or Sn over 50µ" (1.27µm) Ni  
**Operating Temp Range:**  
 -55°C to +125°C with Gold  
 -55°C to +105°C with Tin  
**Contact Resistance:**  
 10 mΩ max  
**Insertion Depth:**  
 (3,68mm) .145" to (6,35mm) .250"  
**Insertion Force:**  
 (Single contact only) (-S plating)  
 Standard= 6oz (1,67N) avg (0,64mm) .025" SQ pin);  
 SSW Low Insertion Force= 3oz (0,83N) avg  
 SSQ Low Insertion Force= 3.3oz (0,92N) avg  
**Normal Force:**  
 Standard= 125grams (4.4N)  
**Withdrawal Force:**  
 (Single contact only) (-S plating)  
 Standard= 5oz (1,39N) avg (0,64mm) .025" SQ pin);  
 SSW Low Insertion Force= 2.6oz (0,72N) avg  
 SSQ Low Insertion Force= 2.9oz (0,81N) avg  
**Max Cycles:**  
 100 with 10µ" (0,25µm) Au  
**Voltage Rating:**  
 550 VAC mated with TSW  
**RoHS Compliant:**  
 Yes: Single & Double Row  
 No: Triple Row  
**Lead-Free Solderable:**  
 Yes



**Mates With:**  
 TSW, MTSW, MTLW,  
 LCW, EW, ZW, TSS,  
 ZSS, TSM, TSSH, HTSS



<b>TYPE STRIP</b>	<b>PIN CENTERS</b>	<b>NO. PINS PER ROW</b>
<b>SSW = Solder Tail</b>	<b>-1 = (2,54mm) .100" Centers</b>	
<b>SSQ = Square Tail</b>		

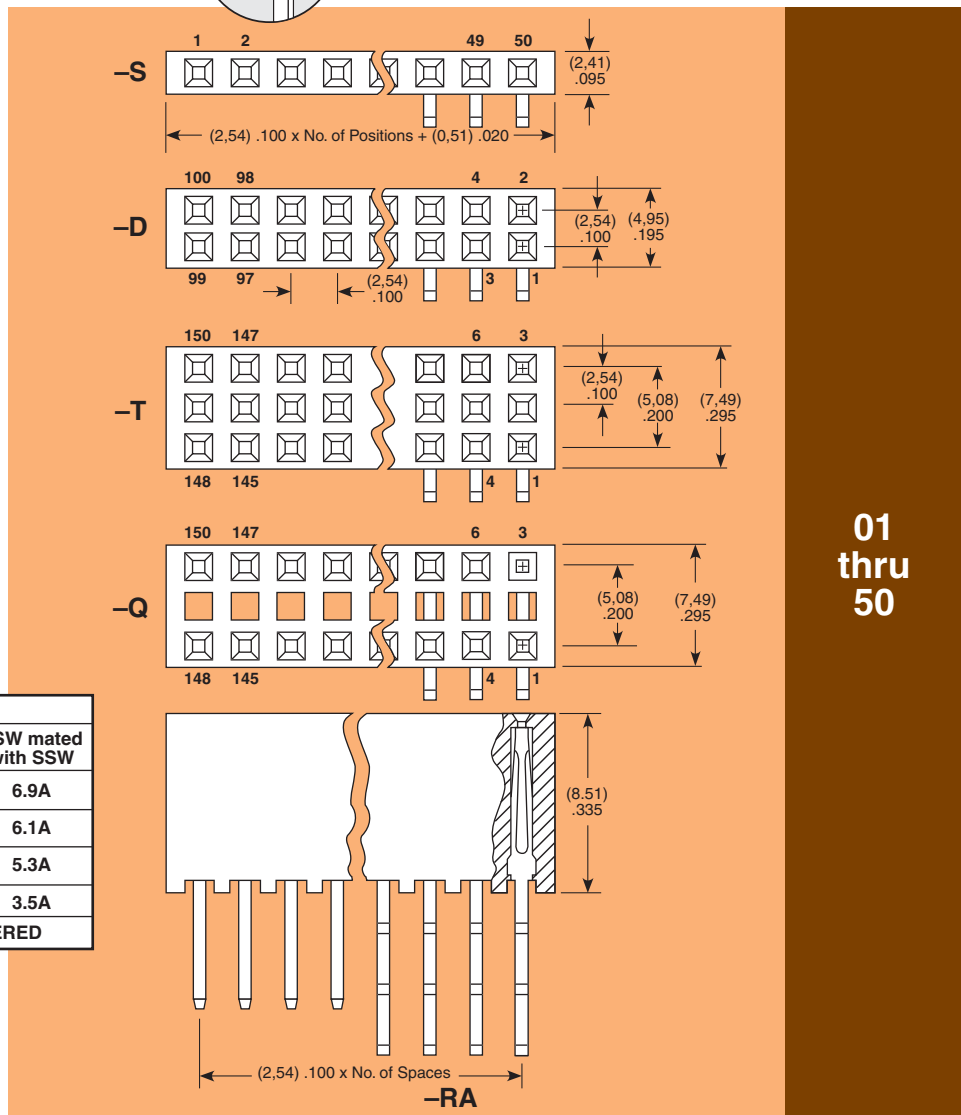


CURRENT RATING		
AMBIENT TEMP	TSW mated with SSQ	TSW mated with SSW
20°C	7.6A	6.9A
40°C	6.9A	6.1A
60°C	5.9A	5.3A
95°C	3.9A	3.5A
6 POSITIONS (2x3) POWERED		

**Note:**  
 Some lengths, styles and options are non-standard, non-returnable.

*Due to technical progress, all designs, specifications and components are subject to change without notice.*

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

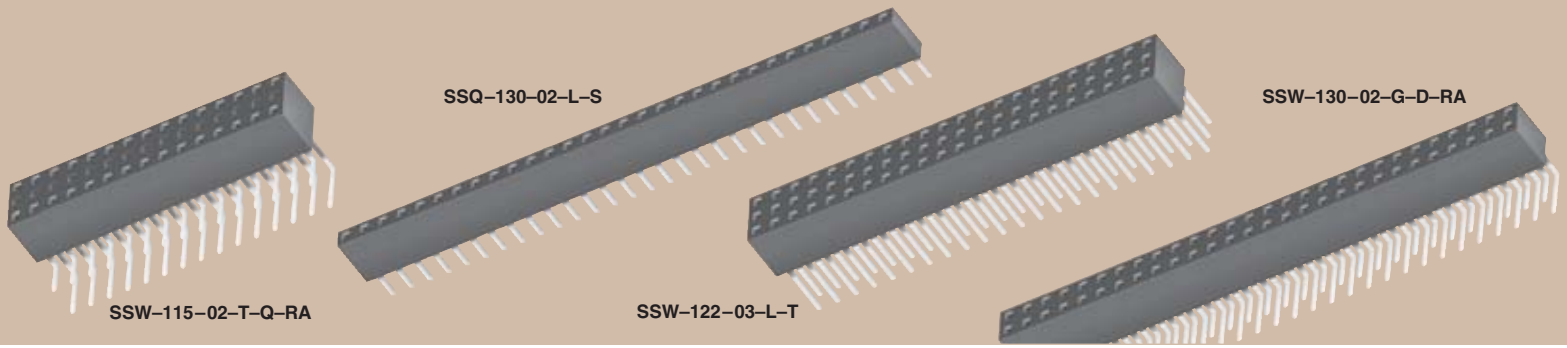

SSW-115-02-T-Q-RA

SSQ-130-02-L-S

SSW-122-03-L-T

SSW-130-02-G-D-RA

### LEAD STYLE

### PLATING OPTION

### ROW OPTION

### TAIL OPTION

### OTHER OPTION

**-F**

= Gold flash on contact,  
Matte Tin on tail

**-L**

= 10µ" (0,25µm) Gold on contact,  
Matte Tin on tail

**-G**

= 20µ" (0,51µm) Gold on contact,  
Gold flash on tail

**-T**

= Matte Tin  
(-T N/A on LIF contacts)

**-S**

= Single Row

**-P**

= Single Row  
(Notched to mate with LCW)  
36 pins max

**-D**

= Double Row

**-T**

= Triple Row

**-Q**


= Double Row  
.200" (5,08mm) row space  
(Outer rows filled only)

**-RA**

= Right Angle  
(Leave blank  
for straight pin  
version)

**-LL**

= Locking Lead



Two leads per strip crimped in opposite directions on or near centerline. Available on tails from (2,29) .090" to (7,87) .310" only. N/A with single row 1 or 2 positions.

**-"XXX"**

= Polarized  
(Specify "XXX" as  
position number)


Note: Other Gold plating options available. Contact Samtec.

## Straight Pin Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE		SINGLE DOUBLE OR TRIPLE A
Standard Insertion Force	Low Insertion Force*	
-01	-21	(2,64) .104
-02	-22	(4,93) .194
-03	-23	(10,00) .394
-04	-24	(14,83) .584
-06**	N/A	(3,15) .124

\* LIF N/A with Tin Plating


\*\*Style -06 N/A with SSQ

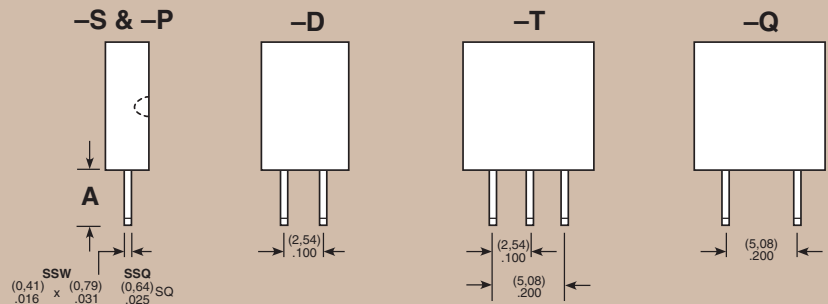

## Right Angle Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE		SINGLE	DOUBLE	TRIPLE
Standard Insertion Force	Low Insertion Force*	(-S & -P) A	(-D) A	(-T & -Q) A
-02	-22	(2,54) .100	(2,54) .100	(2,54) .100
-03	-23	(7,62) .300	(7,62) .300	N/A
-04	-24	(12,45) .490	N/A	N/A

\*LIF N/A with Tin Plating

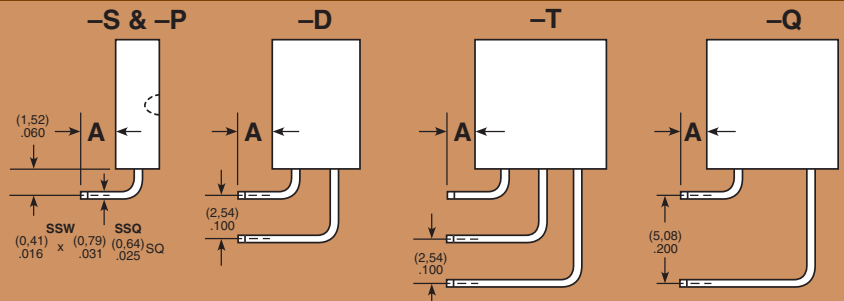

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)