


SS-132-G-2



ESD-115-TT-05

(2.54 mm) .100"

SS, SD, ESD, ESS, HSS SERIES

PRECISION MACHINED SOCKET STRIPS

Mates with:

TS, TD, HTS, BBS, BBD, BBL, BDL, BHS

SPECIFICATIONS

For complete specifications see www.samtec.com?SS, www.samtec.com?ESS, www.samtec.com?SD, www.samtec.com?ESD or www.samtec.com?HSS

Insulator Material:
SS, SD, ESS, ESD= Black G.F. Polyester
HSS= Black Liquid Crystal Polymer

Contact:

BeCu

Shell:

Brass except Style 5A
Phosphor Bronze

Plating:

Au over 50 μ" (1.27 μm) Ni or Sn over 50 μ" (1.27 μm) Ni

Operating Temp Range:

-55 °C to +125 °C

Lead Size Range:

(0.38 mm to 0.56 mm)

.015" to .022" DIA and most IC leads

RoHS Compliant:

Yes

Lead-Free Solderable:

SS, SD, ESS, ESD:

No, Lead Wave only

HSS: Yes

RECOGNITIONS



For complete scope of recognitions see www.samtec.com/quality




FILE NO. E111594

| TYPE STRIP | 1 | NO. PINS PER ROW | PLATING OPTION | LEAD STYLE | OPTION | OTHER OPTION |
|---|---|---|--|--|--|----------------------|
| | | 01 thru 32 =SS, ESS Series | -S = 10 μ" (0.25 μm) Gold contact, Tin shell (Styles 2 & 22 only) | -T = 30 μ" (0.76 μm) Gold contact, Tin shell | -L = Locking Socket | -N = Non Flush |
| | | 01 thru 36 =HSS, SD & ESD Series | -G = 30 μ" (0.76 μm) Gold contact, 10 μ" (0.25 μm) Gold shell | -TT = Tin contact and shell (Styles 1, 2, 4, and 05 except LIF N/A) | <p>Add -L suffix for locking lead socket in end positions. Requires Style -2 or -22 and .035" ± .003 DIA board hole.</p> <p>Requires -T Plating Option</p> | <p>N/A Style -5A</p> |
| SS = Standard Single Row Socket | | HSS = High Temp Single Row Socket | | | | |
| ESS = Elevated Single Row Socket | | | | | | |
| <p>ALSO AVAILABLE (MOQ Required)</p> <ul style="list-style-type: none"> Locking lead option on ESS and ESD series | | | | | | |

LIF= Low Insertion Force

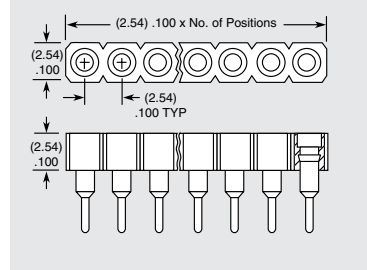


Style -5A not available. Styles -5A & -05 socket heads not countersunk.

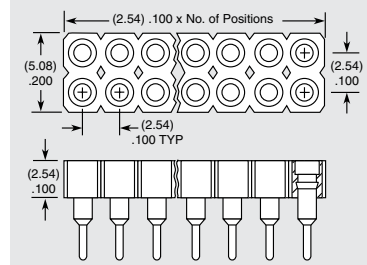


Note: Some lengths, styles and options are non-standard, non-returnable.


-1A, -1B OR -1C
For LIF specify -21A, -21B or -21C (SS, HSS, SD)

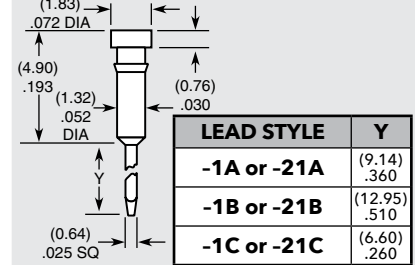

-2, -22*, -5A, or -38*
*For LIF specify -22 or -38 (SS, HSS, SD)

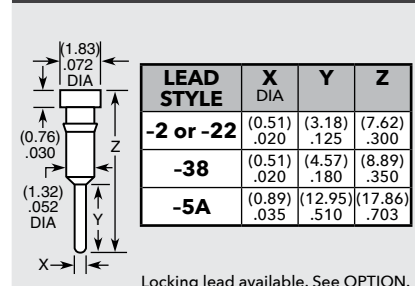

-03, -04, -05
For LIF specify -23 (ESS, ESD)



| LEAD STYLE | A | B | C |
|------------|--------------|--------------|-------------|
| -05 | (17.86) .703 | (13.46) .530 | (4.39) .173 |
| -03 or -23 | (11.51) .453 | (8.38) .330 | (3.12) .123 |
| -04 | (14.05) .553 | (10.92) .430 | (3.12) .123 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[HSS-102-G-2](#) [HSS-101-TT-2](#) [HSS-132-G-2](#) [HSS-103-T-2](#) [HSS-109-S-2](#) [HSS-102-TT-2](#) [HSS-105-S-2](#) [HSS-108-G-2](#) [HSS-106-G-2](#) [HSS-136-G-1C](#) [HSS-136-T-1B](#) [HSS-136-T-1B-N](#) [HSS-136-G-1A](#) [HSS-116-T-2](#) [HSS-116-TT-2](#) [HSS-118-G-3](#) [HSS-118-T-2-L](#) [HSS-120-G-2-N](#) [HSS-120-G-38](#) [HSS-120-S-2](#) [HSS-120-TT-2](#) [HSS-123-T-38](#) [HSS-125-G-2-N](#) [HSS-128-T-18](#) [HSS-132-G-1A](#) [HSS-132-G-1B](#) [HSS-132-T-18-N](#) [HSS-136-G-38](#) [HSS-112-T-18](#) [HSS-114-G-1A](#) [HSS-114-G-1B-N](#) [HSS-115-G-2](#) [HSS-115-G-3](#) [HSS-115-T-21B](#) [HSS-116-T-38](#) [HSS-118-T-22](#) [HSS-118-T-22-L](#) [HSS-120-G-7](#) [HSS-123-T-18](#) [HSS-123-T-1A](#) [HSS-125-S-22](#) [HSS-128-T-2](#) [HSS-129-G-2](#) [HSS-132-G-1C](#) [HSS-132-T-2](#) [HSS-132-T-21A](#) [HSS-134-S-22](#) [HSS-134-T-1B](#) [HSS-134-TT-2](#) [HSS-136-G-2-N](#) [HSS-136-G-3](#) [HSS-136-T-38](#) [HSS-120-T-18](#) [HSS-121-G-38](#) [HSS-121-T-22](#) [HSS-122-T-2](#) [HSS-122-TT-1C](#) [HSS-123-G-2-N](#) [HSS-125-G-1B](#) [HSS-125-G-22](#) [HSS-125-T-1B](#) [HSS-127-TT-2](#) [HSS-130-G-1B](#) [HSS-132-G-18](#) [HSS-132-G-21C](#) [HSS-132-S-2](#) [HSS-132-T-38](#) [HSS-136-G-22-N](#) [HSS-136-S-2-N](#) [HSS-136-T-22-N](#) [HSS-113-S-2](#) [HSS-114-T-22](#) [HSS-116-G-1B](#) [HSS-118-G-22-N](#) [HSS-119-T-22](#) [HSS-120-G-2](#) [HSS-124-G-2](#) [HSS-125-G-2](#) [HSS-125-T-2-L](#) [HSS-130-G-1A](#) [HSS-130-T-2-L](#) [HSS-132-T-2-N](#) [HSS-134-G-7](#) [HSS-134-TT-2-N](#) [HSS-136-G-21A](#) [HSS-136-T-18](#) [HSS-136-T-2](#) [HSS-136-TT-18](#) [HSS-114-S-2](#) [HSS-114-T-1A](#) [HSS-114-T-2](#) [HSS-116-G-21A](#) [HSS-116-G-38](#) [HSS-120-T-2](#) [HSS-120-T-21B](#) [HSS-120-T-22](#) [HSS-122-G-2](#) [HSS-122-G-2-N](#) [HSS-124-T-2](#) [HSS-124-T-21A](#)