




**BOURNS®**

**Features**

- Compliant with AEC-Q200 Rev-C- Stress Test Qualification for Passive Components in Automotive Applications
- 100 % electrically compatible with all previous generations of 1812 SMT devices
- Compatible with Pb and Pb-free solder reflow profiles
- RoHS compliant\* and halogen free\*\*
- Surface mount packaging for automated assembly
- Agency recognition:   
- Standard 4532 mm (1812 mils) footprint
- Patents pending

**MF-MSMF Series - PTC Resettable Fuses**

**Electrical Characteristics**

| Model          | V max. Volts | I max. Amps | I <sub>hold</sub> | I <sub>trip</sub> | Resistance        |                    | Max. Time To Trip |                  | Tripped Power Dissipation |
|----------------|--------------|-------------|-------------------|-------------------|-------------------|--------------------|-------------------|------------------|---------------------------|
|                |              |             | Amperes at 23 °C  |                   | Ohms at 23 °C     |                    | Amperes at 23 °C  | Seconds at 23 °C | Watts at 23 °C            |
|                |              |             | Hold              | Trip              | R <sub>Min.</sub> | R <sub>1Max.</sub> |                   |                  | Typ.                      |
| MF-MSMF010     | 60.0         | 40          | 0.10              | 0.30              | 0.70              | 15.00              | 0.5               | 1.50             | 0.8                       |
| MF-MSMF014     | 60.0         | 40          | 0.14              | 0.34              | 0.40              | 6.50               | 1.5               | 0.15             | 0.8                       |
| MF-MSMF020     | 30.0         | 80          | 0.20              | 0.40              | 0.40              | 6.00               | 6.0               | 0.06             | 0.8                       |
| MF-MSMF020/60  | 60.0         | 40          | 0.20              | 0.40              | 0.40              | 6.00               | 1.5               | 0.15             | 0.8                       |
| MF-MSMF030     | 30.0         | 10          | 0.30              | 0.60              | 0.30              | 3.00               | 8.0               | 0.10             | 0.8                       |
| MF-MSMF050     | 15.0         | 100         | 0.50              | 1.00              | 0.15              | 1.00               | 8.0               | 0.15             | 0.8                       |
| MF-MSMF075     | 13.2         | 100         | 0.75              | 1.50              | 0.11              | 0.45               | 8.0               | 0.20             | 0.8                       |
| MF-MSMF075/24  | 24.0         | 40          | 0.75              | 1.50              | 0.11              | 0.45               | 8.0               | 0.20             | 0.8                       |
| MF-MSMF110     | 6.0          | 100         | 1.10              | 2.20              | 0.04              | 0.21               | 8.0               | 0.30             | 0.8                       |
| MF-MSMF110/16  | 16.0         | 100         | 1.10              | 2.20              | 0.04              | 0.21               | 8.0               | 0.30             | 0.8                       |
| MF-MSMF110/24X | 24.0         | 20          | 1.10              | 2.20              | 0.06              | 0.18               | 8.0               | 0.50             | 0.8                       |
| MF-MSMF125     | 6.0          | 100         | 1.25              | 2.50              | 0.035             | 0.14               | 8.0               | 0.40             | 0.8                       |
| MF-MSMF150     | 6.0          | 100         | 1.50              | 3.00              | 0.03              | 0.120              | 8.0               | 0.5              | 0.8                       |
| MF-MSMF150/24X | 24.0         | 20          | 1.50              | 3.00              | 0.03              | 0.120              | 8.0               | 1.50             | 1.0                       |
| MF-MSMF160     | 8.0          | 100         | 1.60              | 2.80              | 0.035             | 0.099              | 8.0               | 2.0              | 0.8                       |
| MF-MSMF200     | 8.0          | 40          | 2.00              | 4.00              | 0.020             | 0.080              | 8.0               | 3.0              | 0.8                       |
| MF-MSMF250/16X | 16.0         | 100         | 2.50              | 5.00              | 0.015             | 0.100              | 8.0               | 5.0              | 1.2                       |
| MF-MSMF260     | 6.0          | 100         | 2.60              | 5.20              | 0.015             | 0.080              | 8.0               | 5.0              | 0.8                       |

**Environmental Characteristics**

|   |  |
|---|--|
| Operating Temperature.....                                | -40 °C to +85 °C   |
| Maximum Device Surface Temperature in Tripped State ..... | 125 °C   |
| Passive Aging .....                                       | +85 °C, 1000 hours..... ±5 % typical resistance change           |
| Humidity Aging .....                                      | +85 °C, 85 % R.H. 1000 hours..... ±5 % typical resistance change |
| Thermal Shock .....                                       | +85 °C to -40 °C, 20 times..... ±10 % typical resistance change  |
| Solvent Resistance.....                                   | MIL-STD-202, Method 215..... No change                           |
| Vibration .....   | MIL-STD-883C, Method 2007.1,..... No change<br>Condition A       |

**Test Procedures And Requirements For Model MF-MSMF Series**

| Test                 | Test Conditions                                       | Accept/Reject Criteria                   |
|----------------------|---|--|
| Visual/Mech.....     | Verify dimensions and materials.....                  | Per MF physical description              |
| Resistance.....      | In still air @ 23 °C.....                             | R <sub>min</sub> ≤ R ≤ R <sub>1max</sub> |
| Time to Trip.....    | At specified current, V <sub>max</sub> , 23 °C.....   | T ≤ max. time to trip (seconds)          |
| Hold Current.....    | 30 min. at I <sub>hold</sub> .....                    | No trip                                  |
| Trip Cycle Life..... | V <sub>max</sub> , I <sub>max</sub> , 100 cycles..... | No arcing or burning                     |
| Trip Endurance.....  | V <sub>max</sub> , 48 hours.....                      | No arcing or burning                     |
| Solderability.....   | ANSI/J-STD-002.....                                   | 95 % min. coverage                       |

|                              |   |
|------------------------------|---|
| UL File Number .....         | E174545<br><a href="http://www.ul.com/">http://www.ul.com/</a> Follow link to Certifications, then UL File No., enter E174545   |
| CSA File Number.....         | CA110338<br><a href="http://directories.csa-international.org/">http://directories.csa-international.org/</a> Under "Certification Record" and "File Number" enter 110338-0-000 |
| TÜV Certificate Number ..... | R 02057213<br><a href="http://www.tuvdotcom.com/">http://www.tuvdotcom.com/</a> Follow link to "other certificates", enter File No. 2057213                                     |

\*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.  
 \*\*Bourns is using the definition that appears to be the prevalent definition used as the industry standard at this time. The Bourns definition of "halogen-free" is:  
 Bromine (Br) content: ≤ 900 ppm; Chlorine (Cl) content: ≤ 900 ppm; Total Br + Cl content: ≤ 1500 ppm.  
 Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.

## Applications

- Overcurrent and overtemperature protection of automotive electronics
- Hard disk drives
- PC motherboards
- PC peripherals
- Point-of-sale (POS) equipment
- PCMCIA cards
- USB port protection - USB 2.0, 3.0 & OTG
- HDMI 1.4 Source protection

## MF-MSMF Series - PTC Resettable Fuses

**BOURNS®**

Product Dimensions (see next page for outline drawings)

| Model          | A                      |                        | B                      |                        | C                      |                        | D                      | Style |
|----------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-------|
|                | Min.                   | Max.                   | Min.                   | Max.                   | Min.                   | Max.                   | Min.                   |       |
| MF-MSMF010     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.10}{(0.043)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF014     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.10}{(0.043)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF020     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.10}{(0.043)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF020/60  | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.10}{(0.043)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF030     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.10}{(0.043)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF050     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF075     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF075/24  | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF110     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.45}{(0.018)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF110/16  | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.45}{(0.018)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF110/24X | $\frac{4.37}{(0.172)}$ | $\frac{4.83}{(0.190)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.60}{(0.063)}$ | $\frac{0.30}{(0.012)}$ | 2     |
| MF-MSMF125     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF150     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF150/24X | $\frac{4.37}{(0.172)}$ | $\frac{4.83}{(0.190)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.60}{(0.063)}$ | $\frac{0.30}{(0.012)}$ | 2     |
| MF-MSMF160     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF200     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.55}{(0.015)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |
| MF-MSMF250/16X | $\frac{4.37}{(0.172)}$ | $\frac{4.83}{(0.190)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.70}{(0.028)}$ | $\frac{1.60}{(0.063)}$ | $\frac{0.30}{(0.012)}$ | 2     |
| MF-MSMF260     | $\frac{4.37}{(0.172)}$ | $\frac{4.73}{(0.186)}$ | $\frac{3.07}{(0.121)}$ | $\frac{3.41}{(0.134)}$ | $\frac{0.48}{(0.019)}$ | $\frac{0.85}{(0.033)}$ | $\frac{0.30}{(0.012)}$ | 1     |

**Packaging:**

MF-MSMF010 through MF-MSMF030 = 1500 pcs. per reel.  
 MF-MSMF050 through MF-MSMF200 & MF-MSMF260 = 2000 pcs. per reel.  
 MF-MSMF110/24X, MF-MSMF150/24X & MF-MSMF250/16X = 1500 pcs. per reel.


DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

# MF-MSMF Series - PTC Resettable Fuses

**BOURNS®**

## Product Dimensions (see previous page for dimensions)

### Style 1

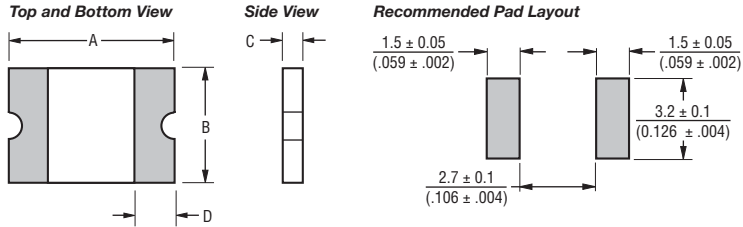

#### Terminal material:

Electroless Ni under immersion Au


#### Termination pad solderability:

Standard Au finish:  
Meets ANSI/J-STD-002 Category 2.


#### Recommended Storage:

40 °C max./70 % RH max.

### Style 2

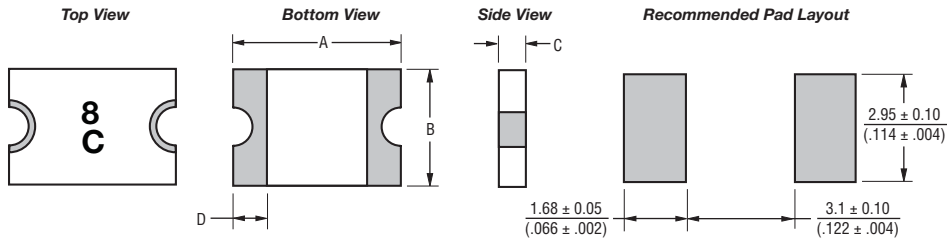

## Typical Time to Trip at 23 °C

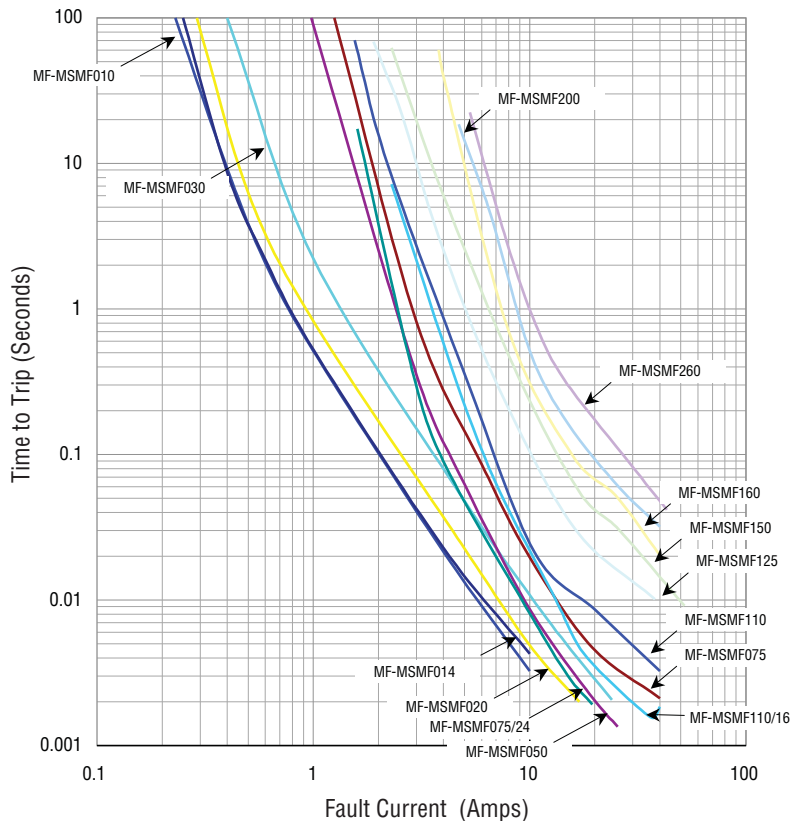

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.


# MF-MSMF Series - PTC Resettable Fuses

# BOURNS®

## Thermal Derating Chart - I<sub>hold</sub> (Amps)

| Model          | Ambient Operating Temperature |        |      |       |       |       |       |       |       |
|----------------|-------------------------------|--------|------|-------|-------|-------|-------|-------|-------|
|                | -40 °C                        | -20 °C | 0 °C | 23 °C | 40 °C | 50 °C | 60 °C | 70 °C | 85 °C |
| MF-MSMF010     | 0.16                          | 0.14   | 0.12 | 0.10  | 0.08  | 0.07  | 0.06  | 0.05  | 0.03  |
| MF-MSMF014     | 0.23                          | 0.19   | 0.17 | 0.14  | 0.12  | 0.10  | 0.09  | 0.08  | 0.06  |
| MF-MSMF020     | 0.29                          | 0.26   | 0.23 | 0.20  | 0.17  | 0.15  | 0.14  | 0.12  | 0.10  |
| MF-MSMF020/60  | 0.29                          | 0.26   | 0.23 | 0.20  | 0.17  | 0.15  | 0.14  | 0.12  | 0.10  |
| MF-MSMF030     | 0.44                          | 0.39   | 0.35 | 0.30  | 0.26  | 0.23  | 0.21  | 0.18  | 0.15  |
| MF-MSMF050     | 0.77                          | 0.68   | 0.59 | 0.50  | 0.44  | 0.40  | 0.37  | 0.33  | 0.29  |
| MF-MSMF075     | 1.15                          | 1.01   | 0.88 | 0.75  | 0.65  | 0.60  | 0.55  | 0.49  | 0.43  |
| MF-MSMF075/24  | 1.15                          | 1.01   | 0.88 | 0.75  | 0.65  | 0.60  | 0.55  | 0.49  | 0.43  |
| MF-MSMF110     | 1.59                          | 1.43   | 1.26 | 1.10  | 0.95  | 0.87  | 0.80  | 0.71  | 0.60  |
| MF-MSMF110/16  | 1.59                          | 1.43   | 1.26 | 1.10  | 0.95  | 0.87  | 0.80  | 0.71  | 0.60  |
| MF-MSMF110/24X | 2.00                          | 1.70   | 1.40 | 1.10  | 0.95  | 0.88  | 0.80  | 0.73  | 0.61  |
| MF-MSMF125     | 1.80                          | 1.63   | 1.43 | 1.25  | 1.08  | 0.99  | 0.91  | 0.81  | 0.68  |
| MF-MSMF150     | 2.17                          | 1.95   | 1.72 | 1.50  | 1.30  | 1.18  | 1.09  | 0.97  | 0.82  |
| MF-MSMF150/24X | 2.10                          | 1.90   | 1.70 | 1.50  | 1.25  | 1.13  | 1.00  | 0.88  | 0.69  |
| MF-MSMF160     | 2.30                          | 2.20   | 1.90 | 1.60  | 1.45  | 1.30  | 1.15  | 1.03  | 0.91  |
| MF-MSMF200     | 3.08                          | 2.71   | 2.35 | 2.00  | 1.80  | 1.60  | 1.50  | 1.40  | 1.25  |
| MF-MSMF250/16X | 3.85                          | 3.45   | 3.00 | 2.50  | 2.05  | 1.85  | 1.75  | 1.30  | 1.10  |
| MF-MSMF260     | 4.00                          | 3.52   | 3.06 | 2.60  | 2.34  | 2.08  | 1.95  | 1.39  | 1.04  |

## Solder Reflow Recommendations

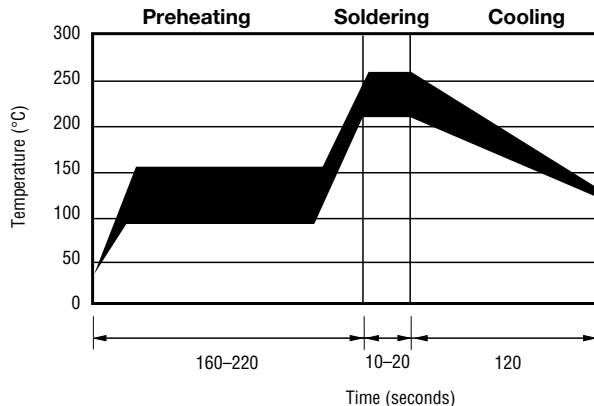


### Notes:

- MF-MSMF models cannot be wave soldered. Please contact Bourns for hand soldering recommendations.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
- Compatible with Pb and Pb-free solder reflow profiles.
- Excess solder may cause a short circuit, especially during hand soldering. Please refer to the Multifuse® Polymer PTC Soldering Recommendation guidelines.



## How to Order

### MF - MSMF 075/24 - 2

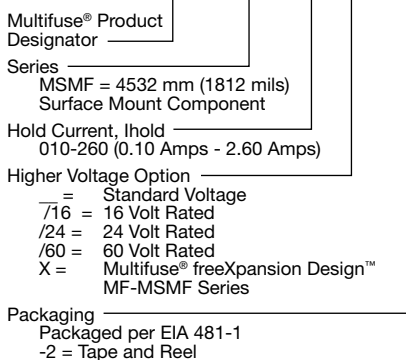

## Typical Part Marking

Represents total content. Layout may vary.

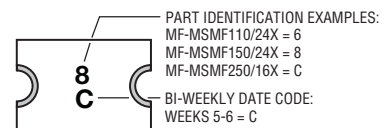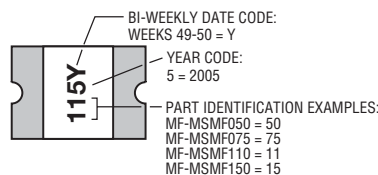

MF-MSMF SERIES, REV. AC, 12/10


"freeXpansion Design" is a trademark of Bourns, Inc.  
Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

# MF-MSMF Series Tape and Reel Specifications

# BOURNS®

| Tape Dimensions        | MF-MSMF010 -<br>MF-MSMF030<br>per EIA-481-1    | MF-MSMF050 -<br>MF-MSMF260<br>per EIA 481-1    | MF-MSMF-110/24X<br>MF-MSMF150/24X<br>MF-MSMF250/16X<br>per EIA 481-1 |
|------------------------|--|--|--|
| W                      | $\frac{12.0 \pm 0.30}{(0.472 \pm 0.012)}$      | $\frac{12.0 \pm 0.30}{(0.472 \pm 0.012)}$      | $\frac{12.0 \pm 0.30}{(0.472 \pm 0.012)}$                            |
| P <sub>0</sub>         | $\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$       | $\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$       | $\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$                             |
| P <sub>1</sub>         | $\frac{8.0 \pm 0.10}{(0.315 \pm 0.004)}$       | $\frac{8.0 \pm 0.10}{(0.315 \pm 0.004)}$       | $\frac{8.0 \pm 0.10}{(0.315 \pm 0.004)}$                             |
| P <sub>2</sub>         | $\frac{2.0 \pm 0.05}{(0.079 \pm 0.002)}$       | $\frac{2.0 \pm 0.05}{(0.079 \pm 0.002)}$       | $\frac{2.0 \pm 0.05}{(0.079 \pm 0.002)}$                             |
| A <sub>0</sub>         | $\frac{3.58 \pm 0.10}{(0.141 \pm 0.004)}$      | $\frac{3.66 \pm 0.15}{(0.144 \pm 0.006)}$      | $\frac{3.70 \pm 0.10}{(0.146 \pm 0.004)}$                            |
| B <sub>0</sub>         | $\frac{4.93 \pm 0.10}{(0.194 \pm 0.004)}$      | $\frac{4.98 \pm 0.10}{(0.196 \pm 0.004)}$      | $\frac{5.10 \pm 0.10}{(0.200 \pm 0.004)}$                            |
| B <sub>1</sub> max.    | $\frac{5.9}{(0.232)}$                          | $\frac{5.9}{(0.232)}$                          | $\frac{5.9}{(0.232)}$  |
| D <sub>0</sub>         | $\frac{1.5 + 0.10/-0.0}{(0.059 + 0.004/-0)}$   | $\frac{1.5 + 0.10/-0.0}{(0.059 + 0.004/-0)}$   | $\frac{1.5 + 0.10/-0.0}{(0.059 + 0.004/-0)}$                         |
| F                      | $\frac{5.5 \pm 0.05}{(0.217 \pm 0.002)}$       | $\frac{5.5 \pm 0.05}{(0.217 \pm 0.002)}$       | $\frac{5.5 \pm 0.05}{(0.217 \pm 0.002)}$                             |
| E <sub>1</sub>         | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$      | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$      | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$                            |
| E <sub>2</sub> min.    | $\frac{10.25}{(0.404)}$                        | $\frac{10.25}{(0.404)}$                        | $\frac{10.25}{(0.404)}$  |
| T max.                 | $\frac{0.6}{(0.024)}$                          | $\frac{0.6}{(0.024)}$                          | $\frac{0.6}{(0.024)}$  |
| T <sub>1</sub> max.    | $\frac{0.1}{(0.004)}$                          | $\frac{0.1}{(0.004)}$                          | $\frac{0.1}{(0.004)}$  |
| K <sub>0</sub>         | $\frac{1.30 \pm 0.10}{(0.051 \pm 0.004)}$      | $\frac{0.95 \pm 0.10}{(0.037 \pm 0.004)}$      | $\frac{1.50 \pm 0.10}{(0.059 \pm 0.004)}$                            |
| Leader min.            | $\frac{390}{(15.35)}$                          | $\frac{390}{(15.35)}$                          | $\frac{390}{(15.35)}$  |
| Trailer min.           | $\frac{160}{(6.30)}$                           | $\frac{160}{(6.30)}$                           | $\frac{160}{(6.30)}$   |
| <b>Reel Dimensions</b> |  |  |  |
| A max.                 | $\frac{185}{(7.28)}$                           | $\frac{185}{(7.28)}$                           | $\frac{185}{(7.28)}$   |
| N min.                 | $\frac{50}{(1.97)}$                            | $\frac{50}{(1.97)}$                            | $\frac{50}{(1.97)}$  |
| W <sub>1</sub>         | $\frac{12.4 + 2.0/-0.0}{(0.488 + 0.079/-0.0)}$ | $\frac{12.4 + 2.0/-0.0}{(0.488 + 0.079/-0.0)}$ | $\frac{12.4 + 2.0/-0.0}{(0.488 + 0.079/-0.0)}$                       |
| W <sub>2</sub> max.    | $\frac{18.4}{(0.724)}$                         | $\frac{18.4}{(0.724)}$                         | $\frac{18.4}{(0.724)}$   |

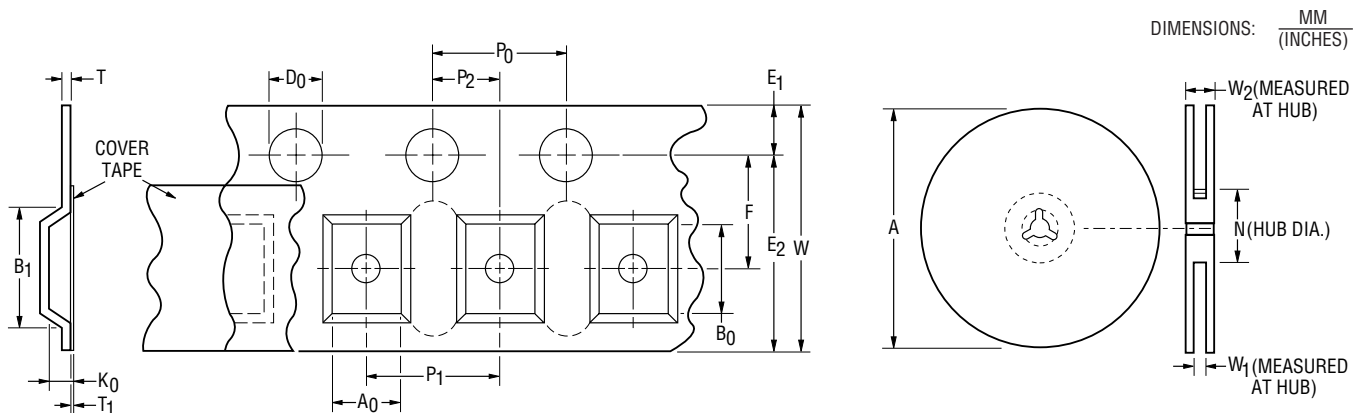

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications