

Lan DC/DC Converter

Model No. DC-101

YCL

Specifications: At 25.

Input Specifications:

1. Input Voltage: 4.75-5.25Vdc.
2. Input Filter: Capacitor Type.
3. Input Current:
 - No Load: 25mA.
 - Full Load: 480mA.

Output Specifications:

1. Output Voltage & Current: -9Vdc/200 mA.
2. Voltage Accuracy: +/-5% max.
3. Line Regulation(at full load condition): +/-5% max.
4. Load Regulation(at full load to 1/2 load): +/-10% max.
5. Temperature Coefficient: +/-0.05%/ max.
6. Ripple & Noise(20MHz BW): 90mV max.
7. Short Circuit Protection: Momentary.

General Specifications:



1. Isolation Voltage: 500Vdc.
2. Efficiency: 75% typical.
3. Switching Frequency: 25KHz min.
4. Isolation Resistance: 1000M ohms.

Environmental Specifications:

1. Operating Temperature: -20 to + 71degree C.
2. Storage Temperature: -40 to +105 degree C.
3. Cooling: Free air convection.
4. Derating: None.
5. Humidity Non-Condensing: 20 to 95% RH.

Dimensions: mm(inch)+/-0.25(0.010)

Pin Connection:

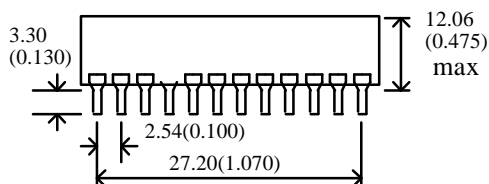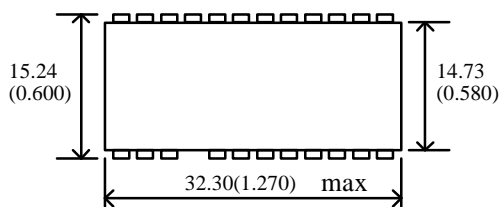

Pin	Function
1&24	+input
10&15	-output
11&14	+output
12&13	-input

Others no connections

Prepared: Dennis Hsieh

Approved: Jess Kuo

Date: Mar 22, '95.

Drawing no.: DC-101

REV: 5

Page: 1/ 1